


# MULTI FUNCTION SWITCH PL3 SERIES

## Push & Lever Type

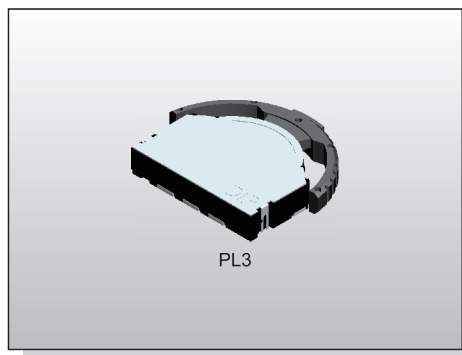

PL3

### FEATURES

※Multiple function (Push & Lever)


### APPLICATION

※Remote controls  
※Volume control for variety of applications

### SPECIFICATION

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| Contact Rating        | 10mA, 5V DC                                       |
| Contact Resistance    | 500mΩ max.                                        |
| Insulation Resistance | 100MΩ min. 100V DC                                |
| Dielectric Strength   | 100V AC/1 minute                                  |
| Operating Force       | 70±50gf, Lever(CW. CCW)<br>200±100gf, Center push |
| Travel                |                                                   |
| Operating Life        | 100,000 cycles                                    |
| Operating Temp.       | -10°C ~ +60°C                                     |
| Storage Temp.         | -30°C ~ +80°C                                     |


### HOW TO ORDER

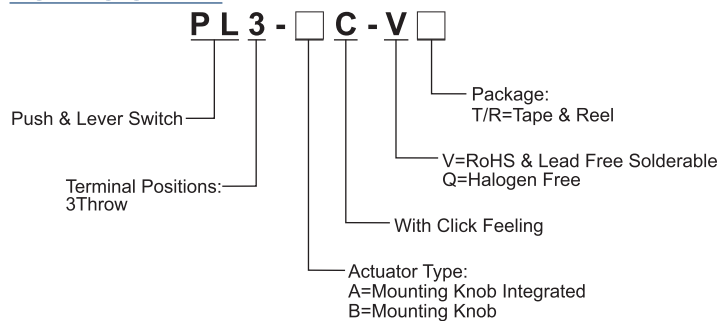





### PACKAGE

<Tape & Reel>  
900 pcs

### CIRCUIT

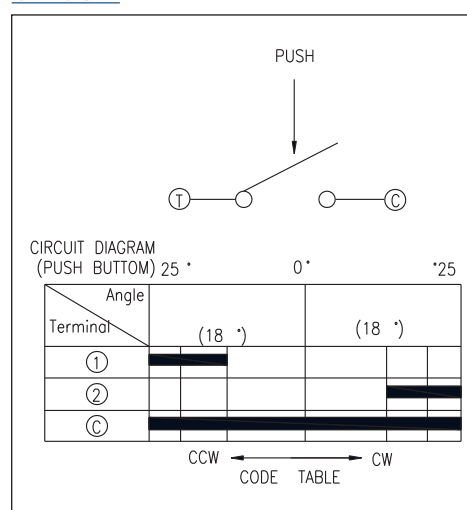

### PL3-AC

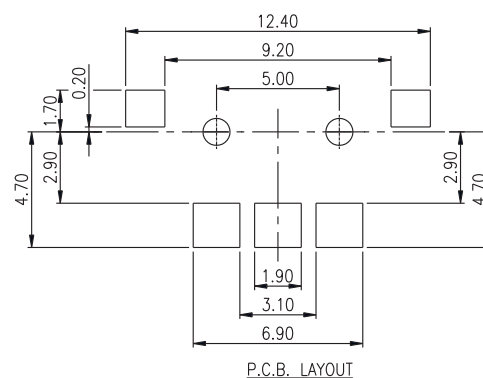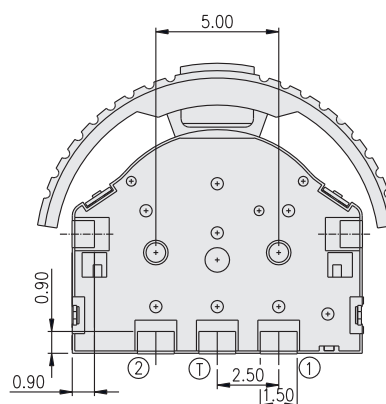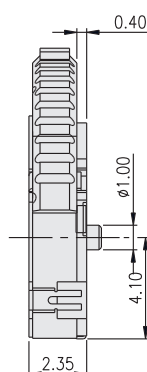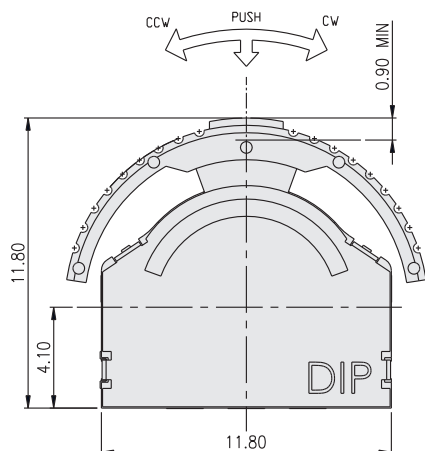

**PL3-BC**

