


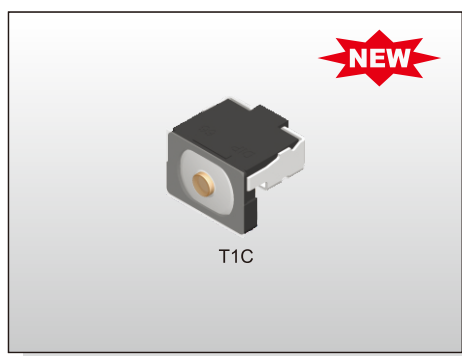

HOW TO ORDER

T 1 C ☐ Q R

- Package: Tape & Reel

- Halogen Free

- Operating Force:
2=160gf

FEATURES

- ※Miniature 2.8*1.95mm
- ※Side push mid-mount type
- ※300,000 operation life cycles
- ※Better soldering peeling strength
- ※Height from surface of PCB:0.975mm


APPLICATION

- ※Smart phone
- ※Medical
- ※Portable electronic device
- ※3C products

SPECIFICATION

Contact Rating	10uA,2V DC to 20mA,15V DC
Contact Resistance	500mΩ max.
Insulation Resistance	50MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	160±50gf
Travel	0.13mm
Operating Life	300,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

CIRCUIT



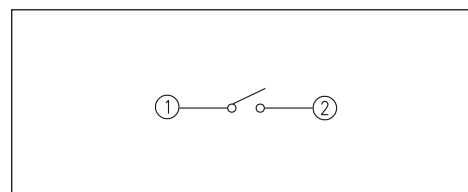


PACKAGE

<Tape & Reel>
5000 pcs

TACT SWITCH

T1C

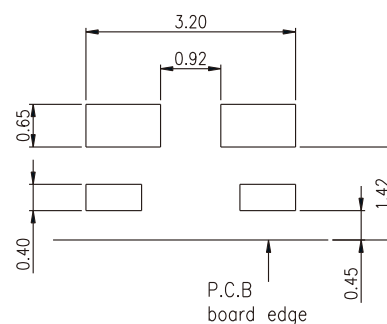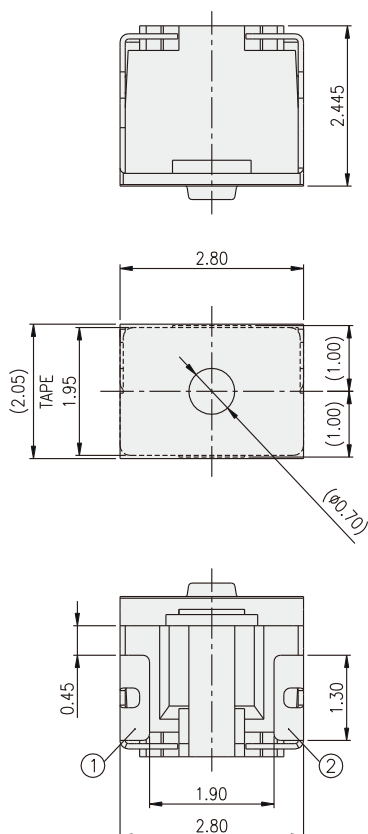

P.C.B. LAYOUT