

FEATURES

- ※ Guiding post offers easy orientation
- ※ Long travel 2.5mm
- ※ 100,000 Operation life cycles


APPLICATION

- ※ Consumer electronics
- ※ Medical devices
- ※ Open/close detection
- ※ NB power off function


SPECIFICATION

| | |
|-----------------------|--------------------|
| Contact Rating | 10mA, 5V DC |
| Contact Resistance | 1Ω max. |
| Insulation Resistance | 100MΩ min. 100V DC |
| Dielectric Strength | 100V AC/1 minute |
| Operating Force | 36gf max. |
| Travel | 2.5mm |
| Operating Life | 100,000 cycles |
| Operating Temp. | -40°C ~ +85°C |
| Storage Temp. | -40°C ~ +85°C |

HOW TO ORDER



CIRCUIT

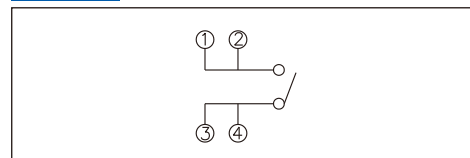

PACKAGE

<Tape & Reel>
1800 pcs

JTE

