

FEATURES

- ※ Compact size
- ※ Two-way operating
- ※ Halogen Free


APPLICATION

- ※ Digital camera
- ※ Notebook
- ※ Automotive

SPECIFICATION

Contact Rating	50 μ A, 3V DC min. 1mA, 5V DC max.
Contact Resistance	2 Ω max.
Insulation Resistance	100M Ω min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	35gf max.
Travel	1.15mm
Operating Life	50,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C


CIRCUIT

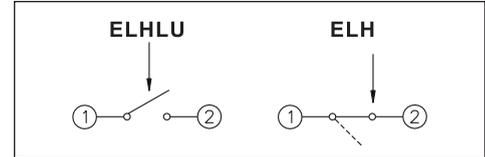

PACKAGE

<Tape & Reel>
3500 pcs

HOW TO ORDER

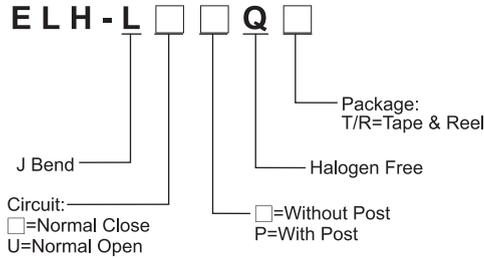

ELH

