


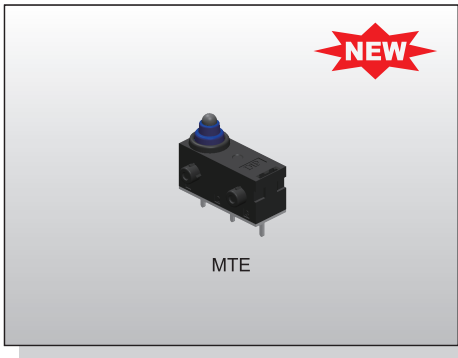

FEATURES

- ※Compact size: 13.3x5.3x6.5mm
- ※With internal resistor
- ※Water-proof IP67

APPLICATION

- ※Home appliances
- ※Automotive (Hood Latch, EV Charger)
- ※Industrial equipment

SPECIFICATION

Contact Rating	50μA , 5V DC Min. 0.1A , 12VDC Max.
Contact Resistance	500mΩ max. (initial)
Insulation Resistance	100MΩ min.
Dielectric Strength	500V AC / 1 minute
Operating Force	P1 : 100gf±50gf L31 : 300gf Max.
Operating Life	300,000 cycles min.
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

MTE -

Ratings:
01=12VDC 0.1A

Actuator:
P =Pin Plunger

Contact Form:
1=SPDT


V=RoHS & Lead Free

Plating:
G=Silver Plating

Terminals:
H=PCB Terminal

Posts:
A=Without Posts
J =Posts on Left
K=Posts on Right
T=Posts on Left / Right
C=M3 screw hole

CIRCUIT

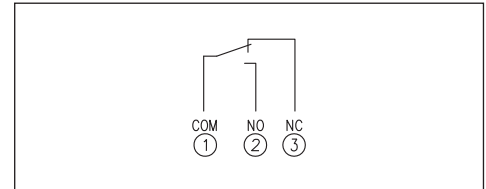

PACKAGE

<Bag>
500 pcs

MTE

