


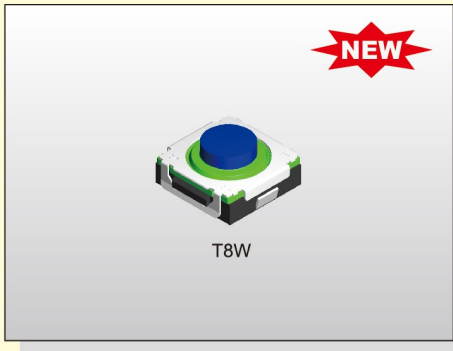

T8W

FEATURES

- ※8.5x8.5x3.95mm
- ※Vertical
- ※Sealed type IP67

APPLICATION

- ※Automotive Electronics
- ※Wiper Controllers
- ※Power Tailgate Systems
- ※Steering Wheel Switches
- ※Center Console Controls

SPECIFICATION


Contact Rating	10μA, 1VDC Min. 50mA, 16VDC Max.
Contact Resistance	100mΩ Max. (initial)
Insulation Resistance	100MΩ Min. 100V DC
Dielectric Strength	250VAC /1 minute
Operating Force	400±80gf (Red+Green) 400+100/-50gf (Iron+White) 700±150gf (Green+Green) 1000±200gf (Blue+Green)
Travel	IW:0.7mm RG、GG、BG:0.9mm
Operating Life	500,000 cycles(400g) 1,000,000 cycles(700g) 200,000 cycles(1,000g)
Operating Temp.	-40°C ~ +90°C
Storage Temp.	-40°C ~ +90°C

HOW TO ORDER

T 8 W - [] [] [] []

- J=J Bend:
- Package:
R=Tape & Reel
- Q=Halogen Free
- Contact Plating:
G=Plating Ag
- Operating Force:
IW=400gf
RG=400gf
GG=700gf
BG=1000gf

CIRCUIT

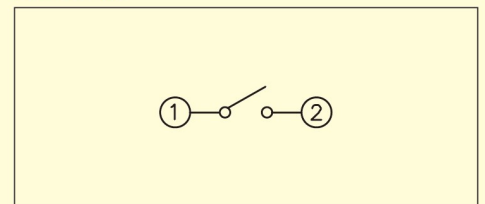

PACKAGE

<Tape & Reel>
1500 pcs

T8W

