


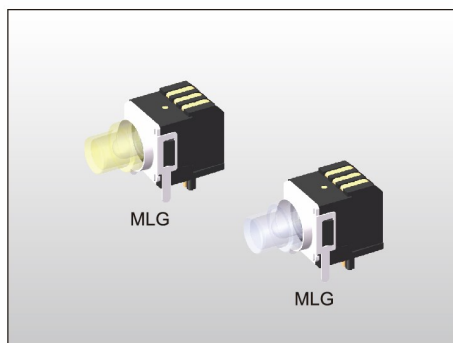

FEATURES

- ※Horizontal Operation
- ※Various LED colors
- ※8.0x9.45x17.1mm


APPLICATION

- ※Servers
- ※Networking Equipment
- ※Industrial Control Systems
- ※Communication Cabinets

SPECIFICATION

Contact Rating	0.1mA , 20 VDC Min. 50mA , 32VDC Max.
Contact Resistance	100mΩ Max. (initial)
Insulation Resistance	100MΩ Min. 500V DC
Dielectric Strength	250VAC /1 minute
Operating Force	400±120gf
Travel	2.4±0.3mm
Operating Life	25,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

CIRCUIT

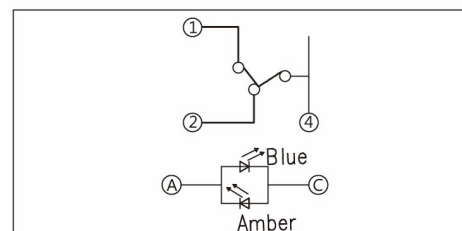

PACKAGE

<Tape & Reel>
290 pcs.

HOW TO ORDER

MLG - 5G **VR -**

G=With Ground Pin

Solder Type: —
H=Through Hole
L=L SMT
M=S.M.T.
A=Right Angle

Operation Force:
4=400g

LED Color: —
☐=Without LED
 B=Blue
 A=Amber

- CAP Color:
T0=Transparent
TA=Transparent (PAR)

- Package:
Tape & Reel

- V=RoHS & Lead Free Solderable

MLG