



ESL

FEATURES

- ※Water-proof type IP67
- ※Two-pole fast-switching circuit
- ※300,000 life cycles


APPLICATION

- ※Automotive
- ※Energy and industrial
- ※HVAC

SPECIFICATION

Contact Rating	50 μ A , 5 VDC Min. 50mA , 18VDC Max.
Contact Resistance	100m Ω Max. (initial)
Insulation Resistance	100M Ω Min. 500V DC
Dielectric Strength	500VAC/1 minute
Operating Force	200 $\pm$ 50gf
Operating Position	NC 11.0mm NO 11.7mm
Operating Life	300,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

CIRCUIT

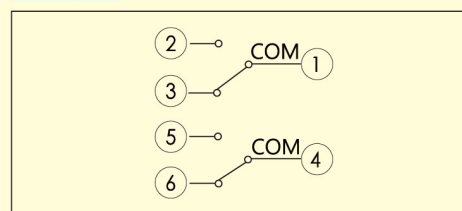

PACKAGE

<Tape & Reel>

200 pcs

<Tube>

30 pcs

HOW TO ORDER

ESL - [] [] [] [] []

Actuator:
P=Pin Plunger

Terminal:
M=S.M.T.
H=Through Hole


Special Code

Package:
R=Reel (S.M.T. Only)
B=Tube (Through Hole Type Only)

Q=Halogen Free

Plating:
G=Silver Plating

ESL-PMGQR

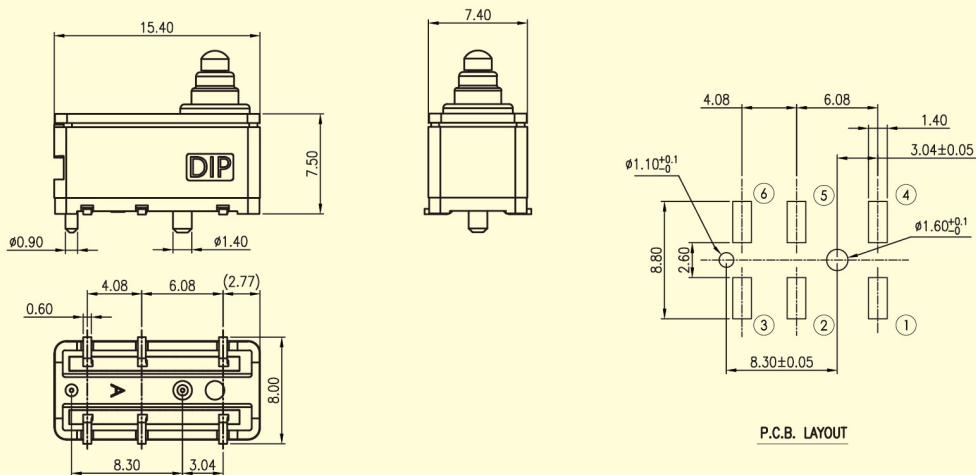

ESL-PHGQB

