


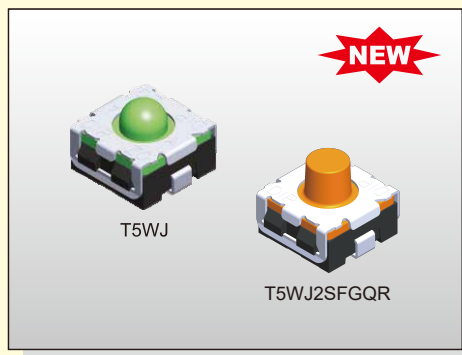

FEATURES

- ※5.25x5.4mm with long travel
- ※Less activation sound
- ※Clear operation feeling
- ※Sealed IP67


APPLICATION

- ※Automotive
- ※Gaming
- ※Smart metering
- ※Industrial


SPECIFICATION

Contact Rating	10uA, 1V DC min. 50mA, 16V DC max.
Contact Resistance	100mΩ max.(initial)
Insulation Resistance	100MΩ min.
Dielectric Strength	250V AC/1 minute
Operating Force	350±60gf
Operating Life	250,000 cycles min.
Operating Temp.	-40°C ~ +105°C
Storage Temp.	-40°C ~ +105°C

HOW TO ORDER

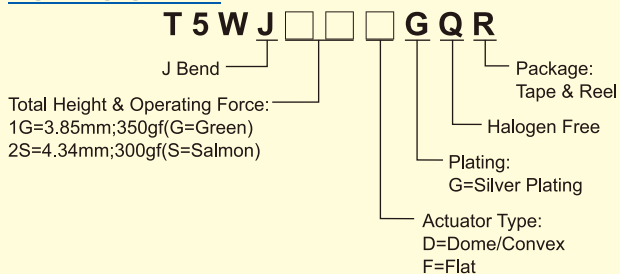

CIRCUIT

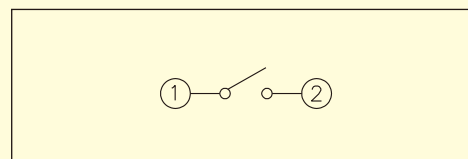


PACKAGE

<Tape & Reel>

1G = 1900 pcs

2S = 1700 pcs

T5WJ DGQR

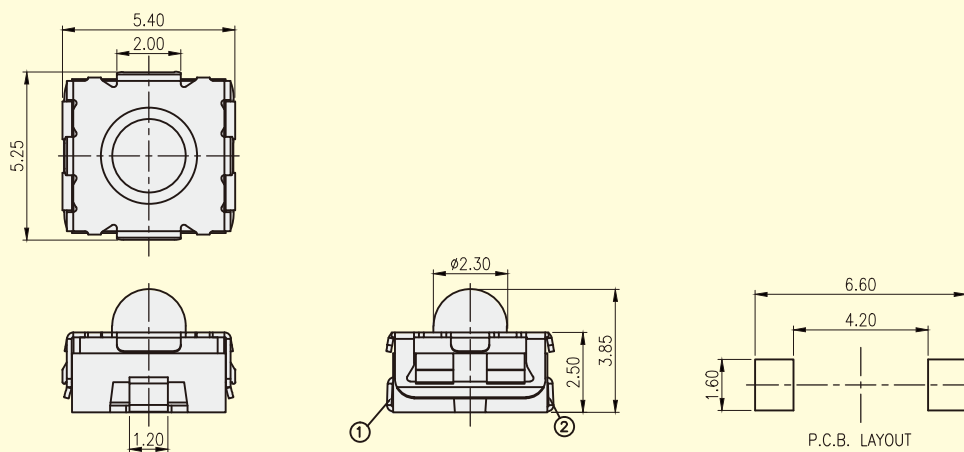

T5WJ FGQR

