


# SLIDE SWITCH MSS(3)(4) SERIES

## Miniature & SMT Type (1P2T, 1P3T)

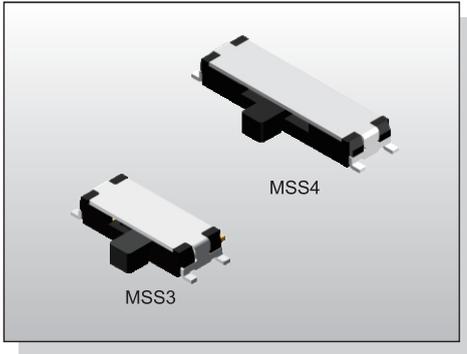

### FEATURES

- ✘ 1.4mm height
- ✘ 1P2T, 1P3T models
- ✘ Stroke 1.5mm


### APPLICATION

- ✘ Remote control
- ✘ Consumer electronics
- ✘ Instrumentations


### SPECIFICATION

Contact Rating	25mA , 24V DC	
Contact Resistance	70mΩ max	
Insulation Resistance	100MΩ min. 100V DC	
Dielectric Strength	100V AC/1 minute	
Operating Force	150±100gf (1.47N±0.98N)	MSS3
	A→B 150±100gf (1.47N±0.98N)	MSS4
	C→B 150±100gf (1.47N±0.98N)	
	B→C 200±150gf (1.96N±1.47N)	
B→A 200±150gf (1.96N±1.47N)		
Travel	1.5mm	
Operating Life	10, 000 cycles	
Operating Temp.	-40°C ~ +85°C	
Storage Temp.	-40°C ~ +85°C	

### HOW TO ORDER

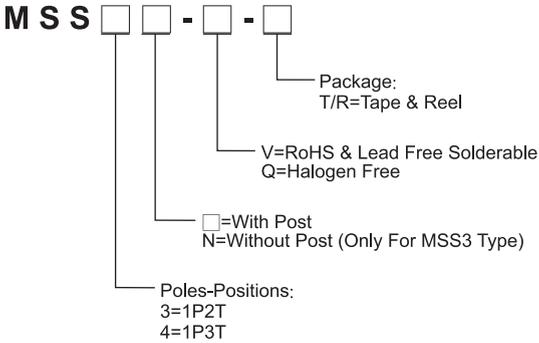


### CIRCUIT

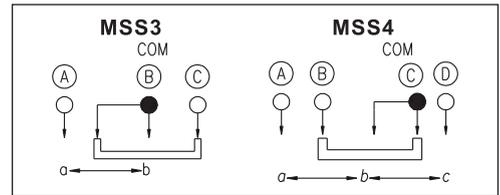

### PACKAGE

<Tape & Reel>  
2500 pcs

### MSS3

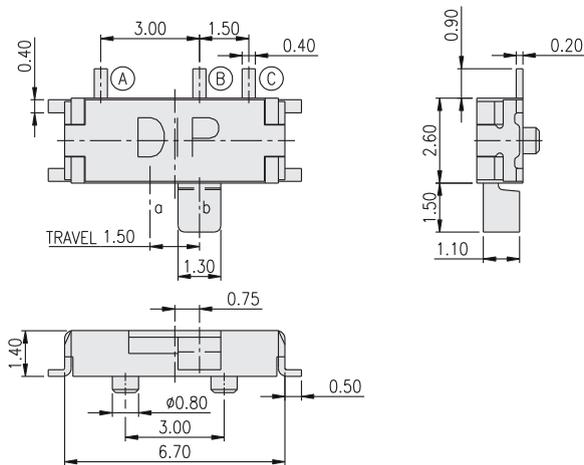

### MSS4

