

FEATURES

※Multi function (Push & Lever)


APPLICATION

- ※Remote controls
- ※Volume control for variety of applications
- ※TV


SPECIFICATION

Contact Rating	10mA, 5V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	40±20gf, Return actuator 150+100/-50gf, Center push direction
Operating Life	100,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

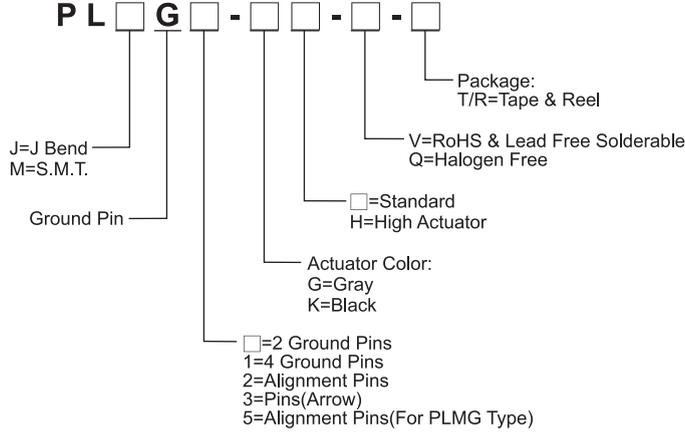


CIRCUIT

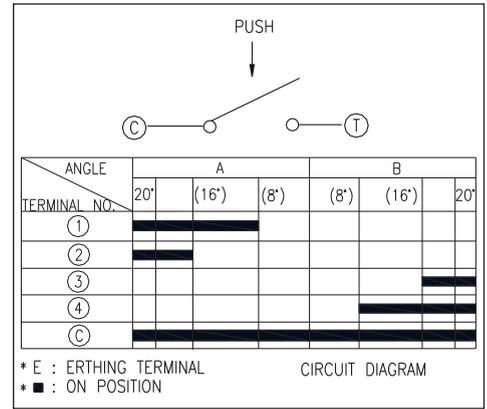


PACKAGE

<Tape & Reel>
 PLJ(G), PLJG1: 1000 pcs
 PLJG(2)(3): 800 pcs
 PLMG5: 750 pcs


PLJ

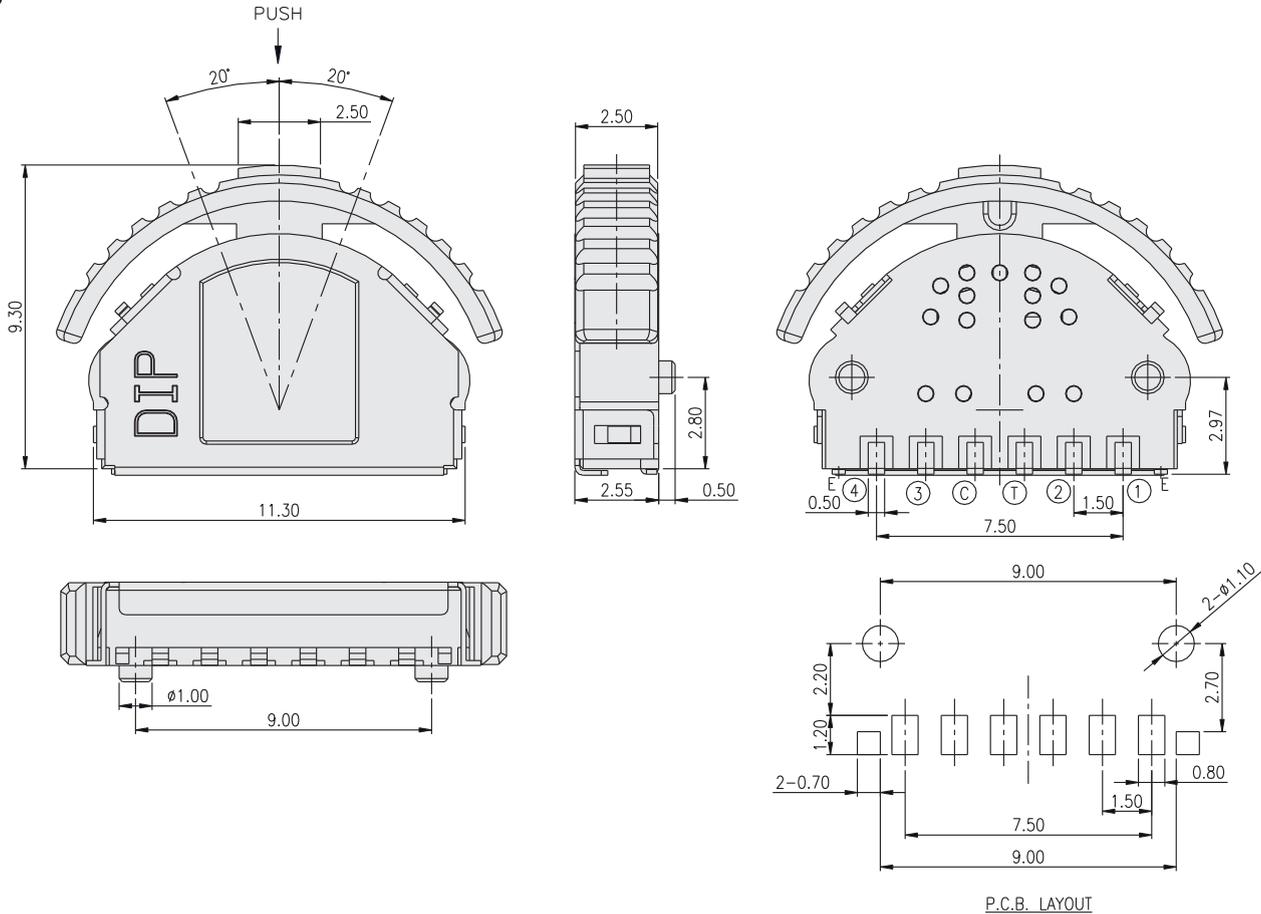


PLJG

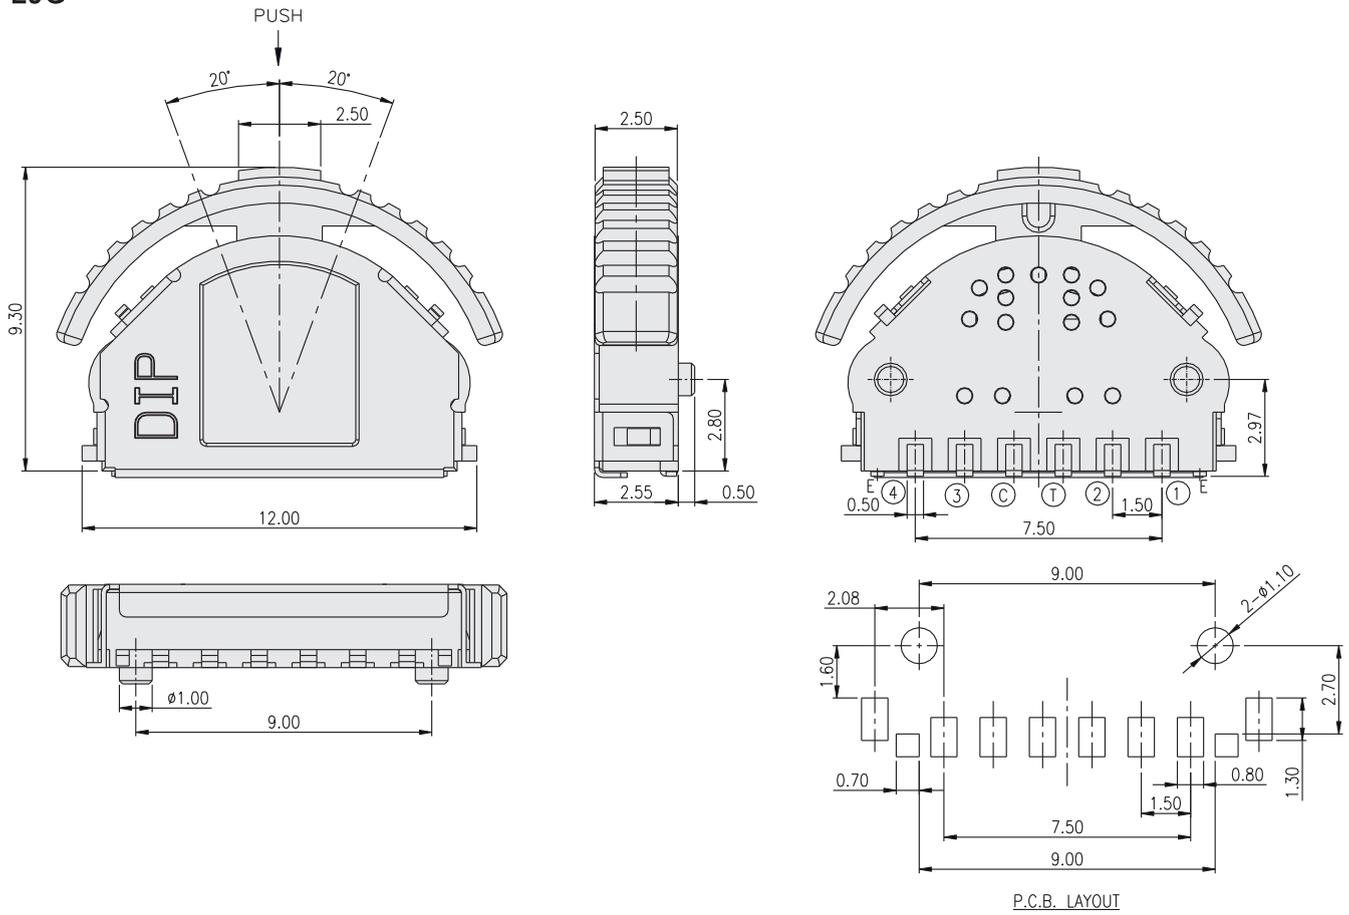


PLJG1

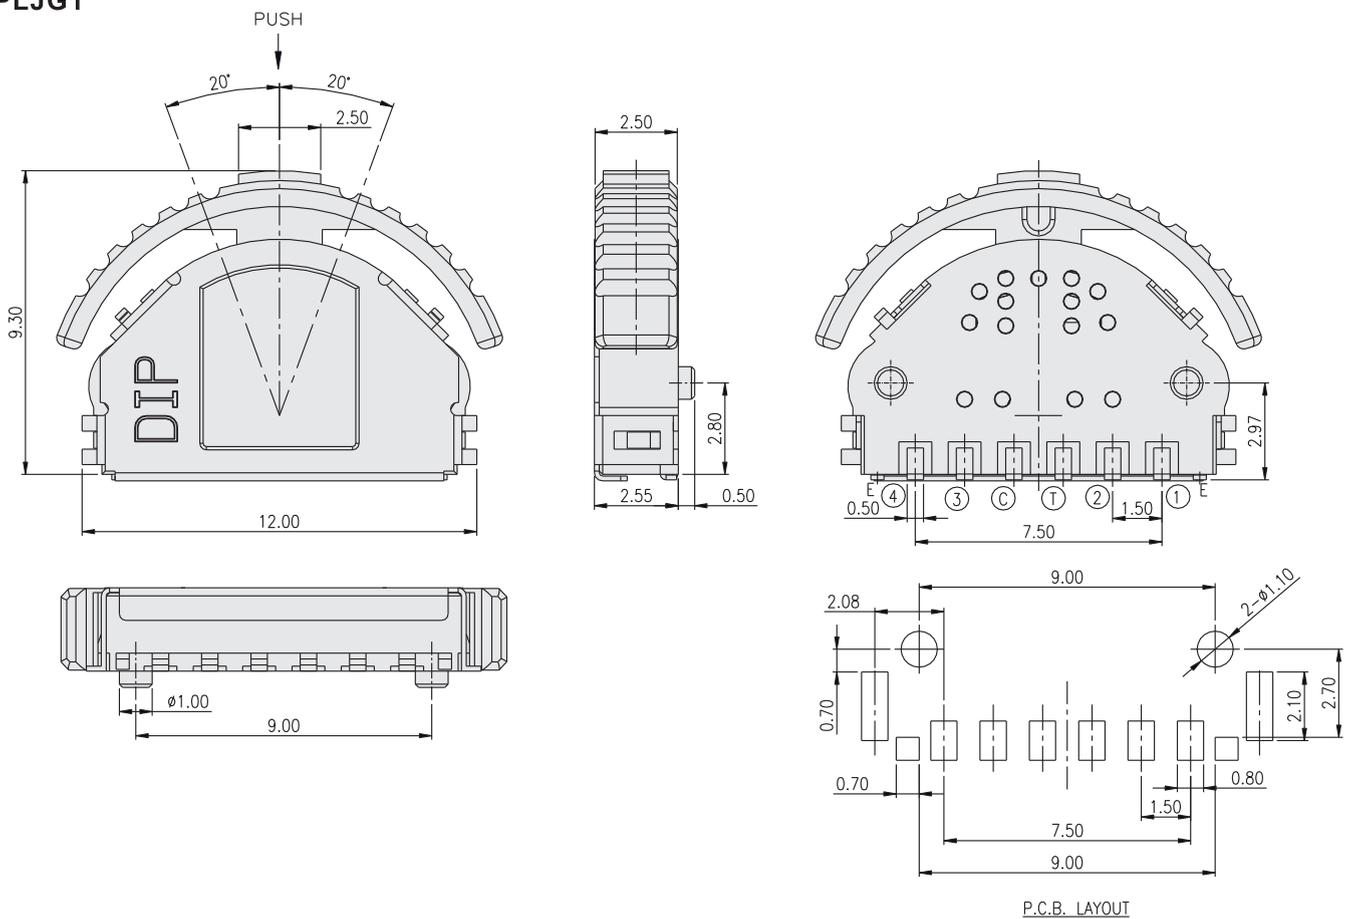

PLJG□-H

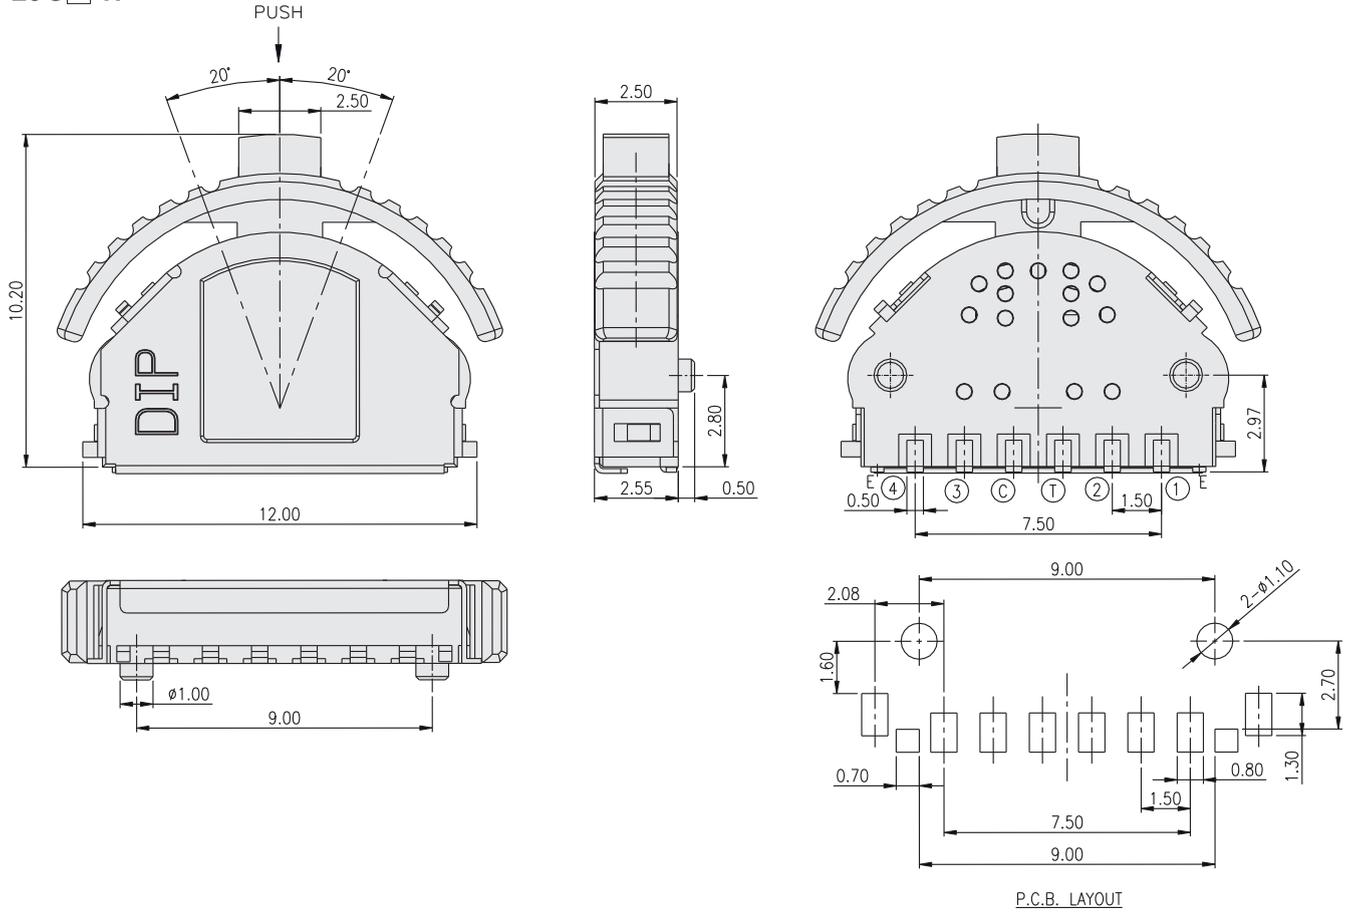

PLJG2

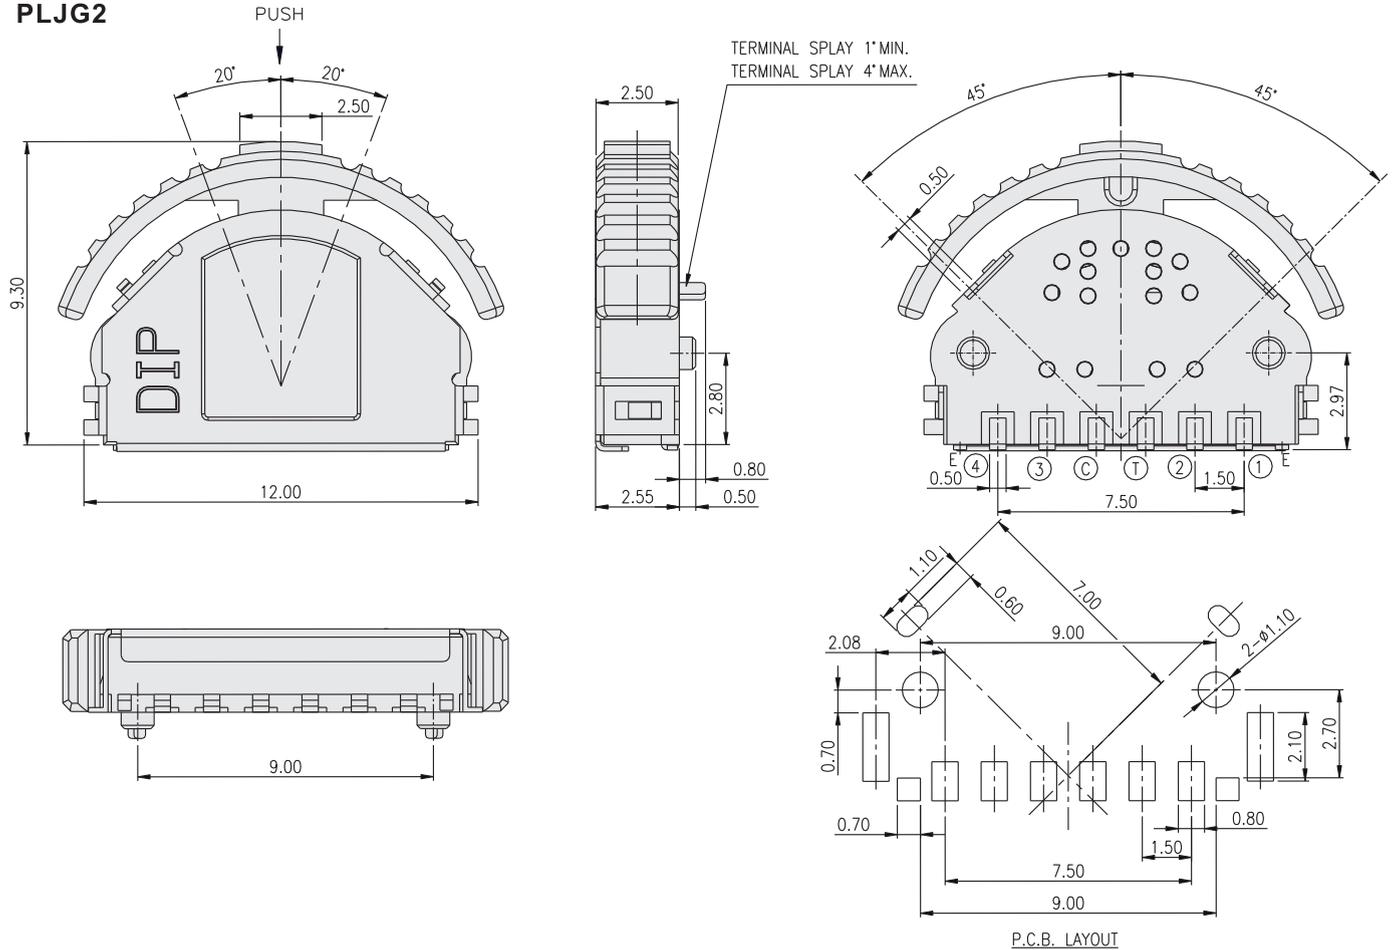


MULTI FUNCTION SWITCH
PL SERIES


**Push & Lever
Type**



PLJG3

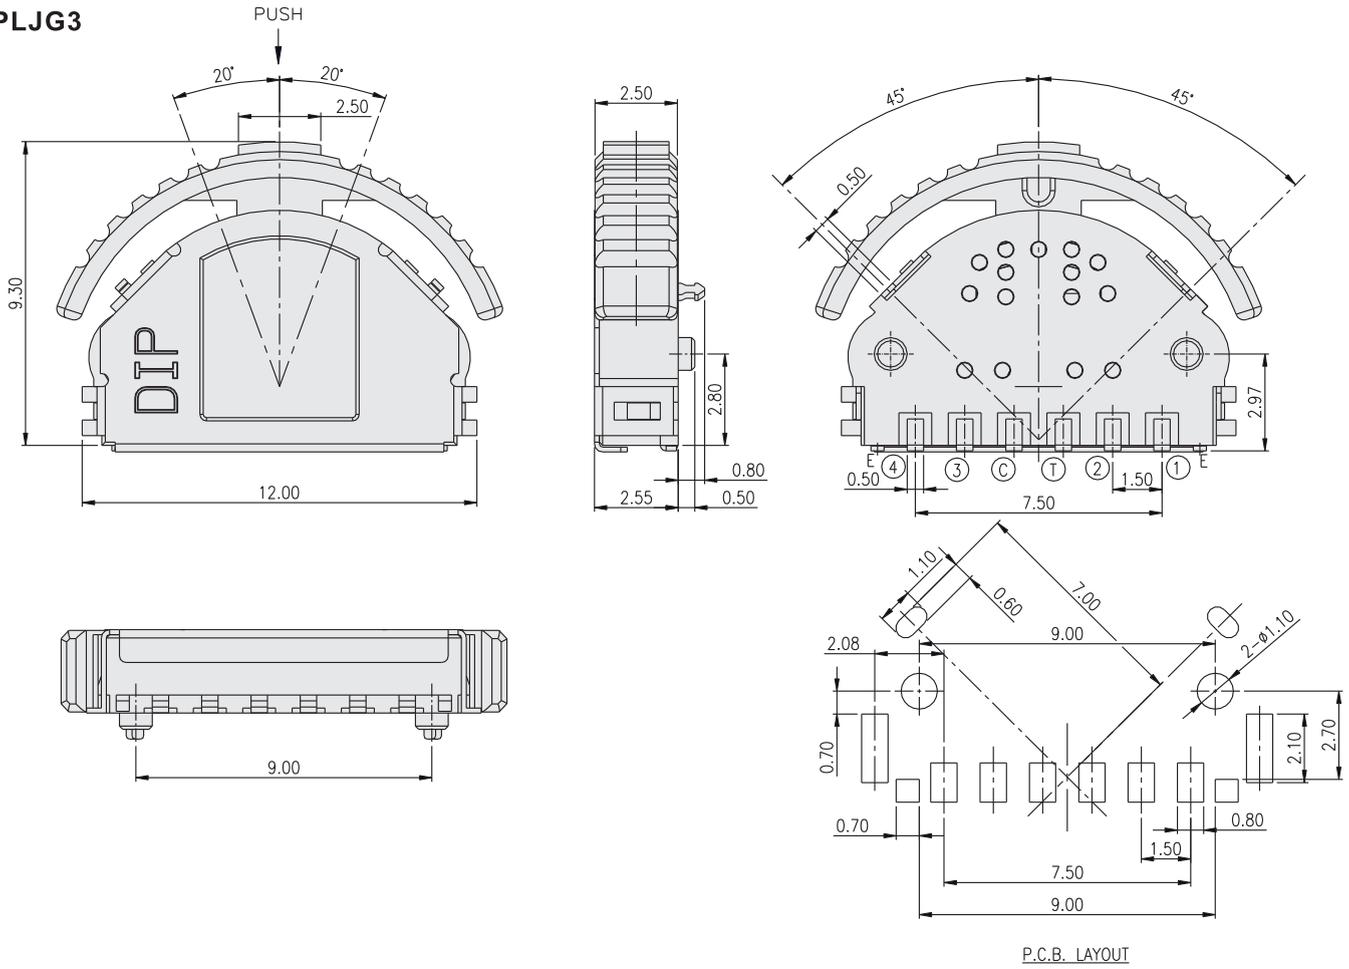

PLMG5-H

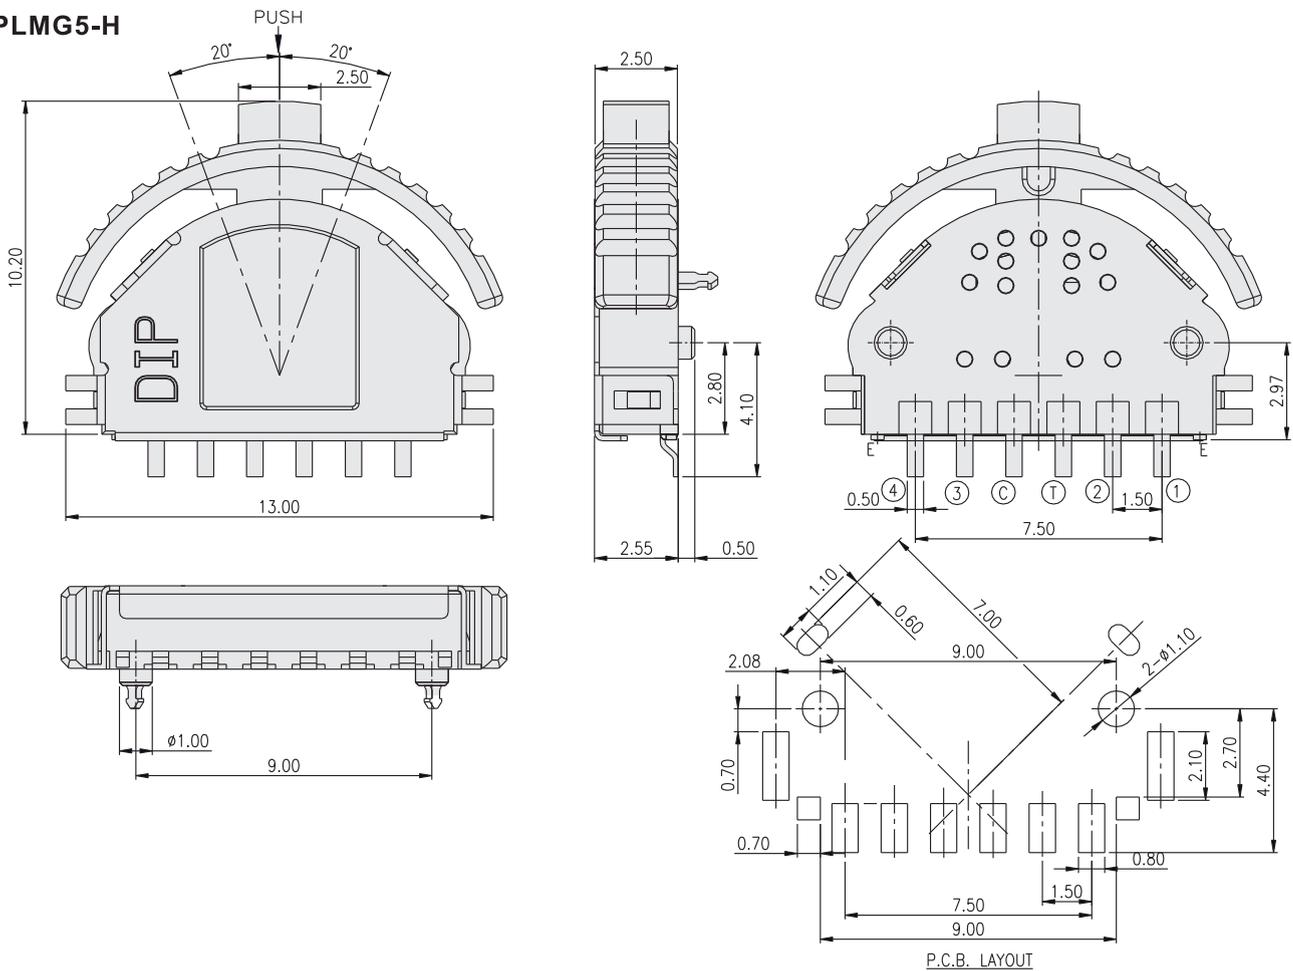

MULTI FUNCTION SWITCH