

FEATURES

- ※Low noise operation
- ※Dust and water resistance
- ※With internal resistors option


APPLICATION

- ※Automotive
- ※Industrial equipment
- ※White goods


SPECIFICATION

Contact Rating	1mA~100mA, ≤25V DC
Contact Resistance	free position(680Ω±1.5%) 8.3mm~9.15mm (3380Ω±1.5%) 6.85mm~8.0mm (<=500mΩ)
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Operating Force	Actuating Force <= 1.6N
Operating Life	200,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

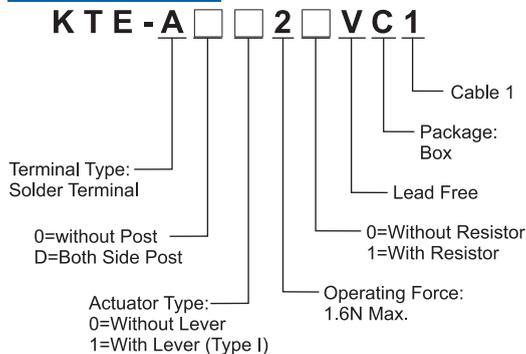

CIRCUIT

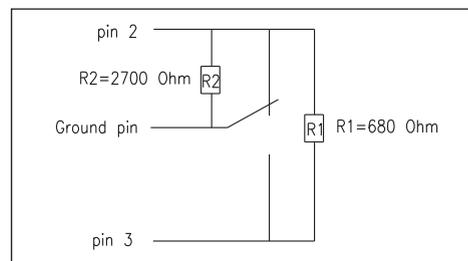


PACKAGE

<Box>
240 pcs

DETECTOR SWITCH

KTE

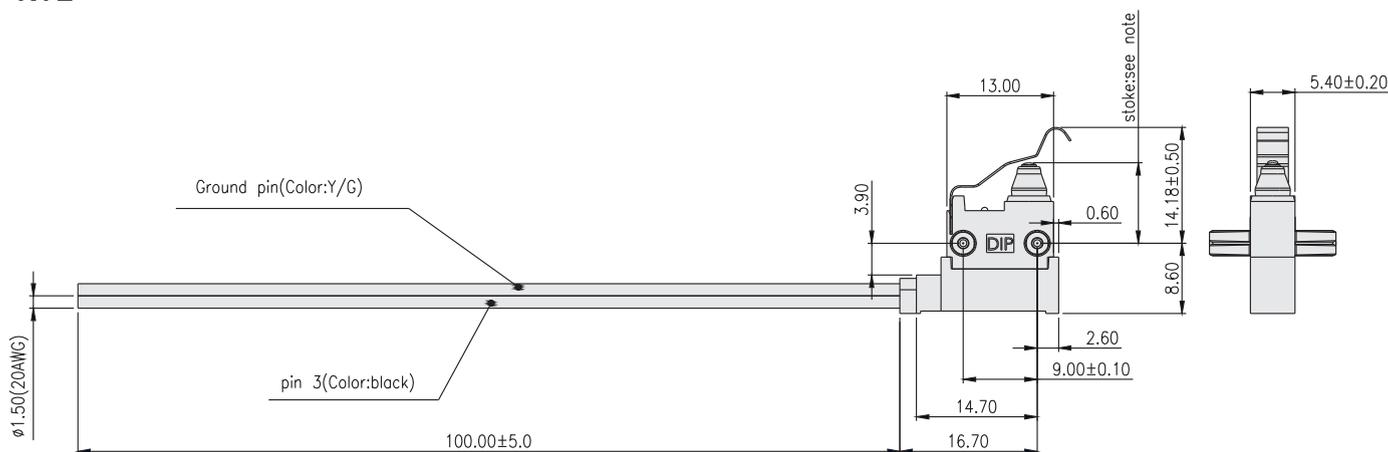

Note:
Stroke: free position 9.85mm (680Ω±1.5%)
8.3mm~9.15mm (3380Ω±1.5%)
6.85mm~8.0mm (<=500mΩ)

