

FEATURES

- ※Ultra-low profile with 2.0mm
- ※Sharp detection feeling


APPLICATION

- ※Detection of car audio mechanism
- ※Smoke detector
- ※Notebook


SPECIFICATION

| | |
|-----------------------|--------------------|
| Contact Rating | 1mA, 5V DC |
| Contact Resistance | 1Ω max. |
| Insulation Resistance | 100MΩ min. 100V DC |
| Dielectric Strength | 100V AC/1 minute |
| Operating Force | 105gf max. |
| Travel | 2.0mm |
| Operating Life | 100,000 cycles |
| Operating Temp. | -40°C ~ +85°C |
| Storage Temp. | -40°C ~ +85°C |

HOW TO ORDER

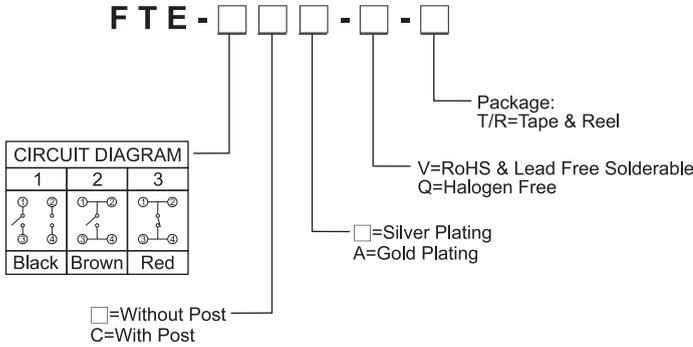


CIRCUIT

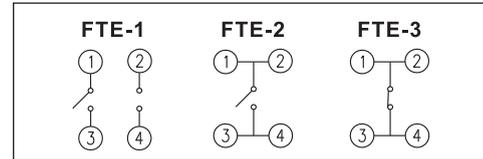


PACKAGE

<Tape & Reel>
3000 pcs

FTE-1C

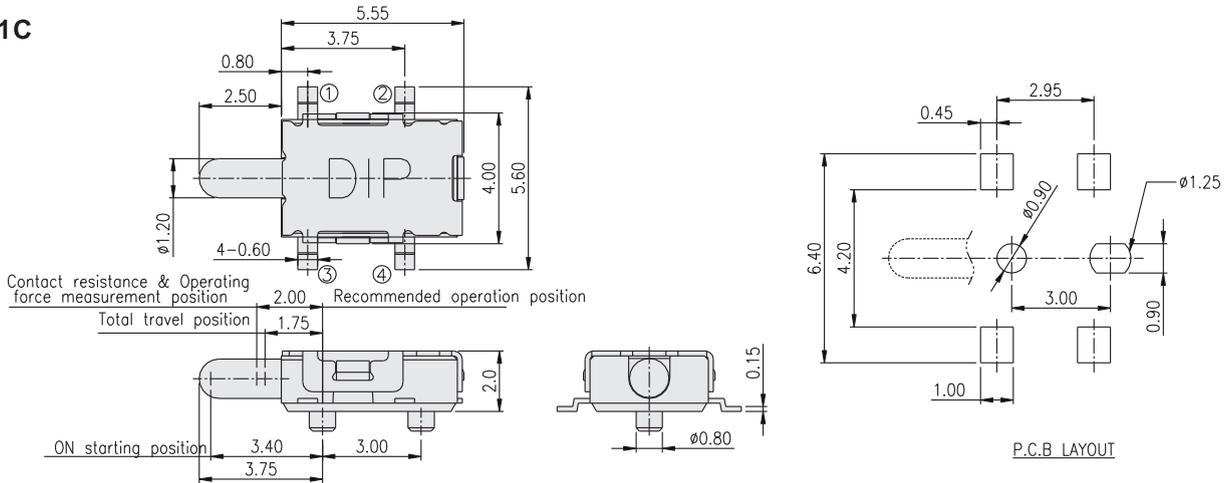

FTE-2

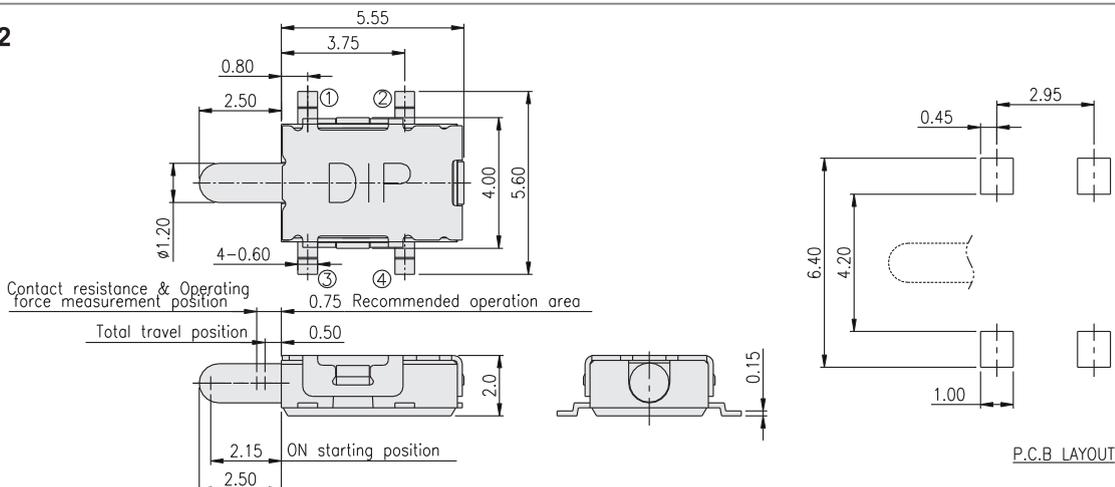

FTE-3C

