

**FEATURES**

- ※ Guiding post offers easy orientation
- ※ Long travel 2.5mm
- ※ 100,000 operating life cycles


**APPLICATION**

- ※ Consumer electronics
- ※ Medical devices
- ※ Open/close detection
- ※ NB power off function


**SPECIFICATION**

Contact Rating	10mA, 5V DC
Contact Resistance	1Ω max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	36gf max.
Travel	1.3mm
Operating Life	100,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

**HOW TO ORDER**



**CIRCUIT**

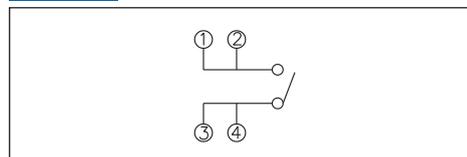

**PACKAGE**

<Tape & Reel>  
1800 pcs

**JTE**

