

TT5

FEATURES

- ※Low-Profile of height 1.55mm
- ※Sharp operation feeling

APPLICATION


- ※Portable electronic devices
- ※Remote control
- ※Industrial applications

SPECIFICATION


Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Operating Force	180±60gf, Side 320+80/-60gf, Center
Travel	0.25mm
Operating Life	200,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

TT5-V-





CIRCUIT

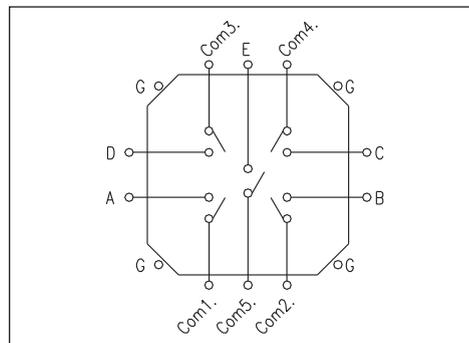

PACKAGE

- <Tube>
47 pcs
- <Tape & Reel>
2500 pcs

TT5

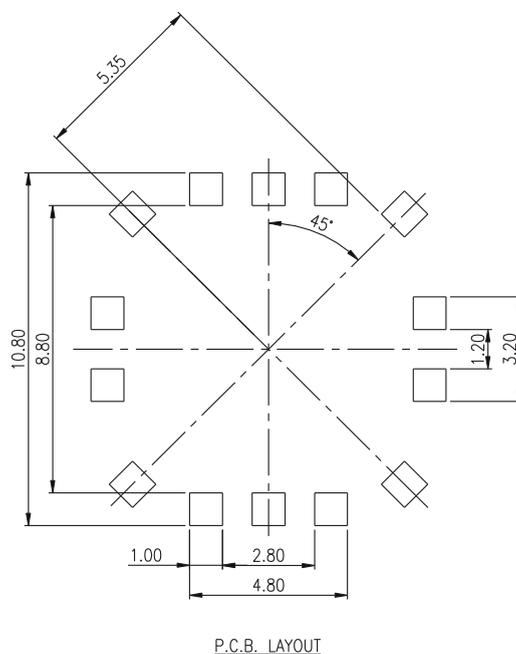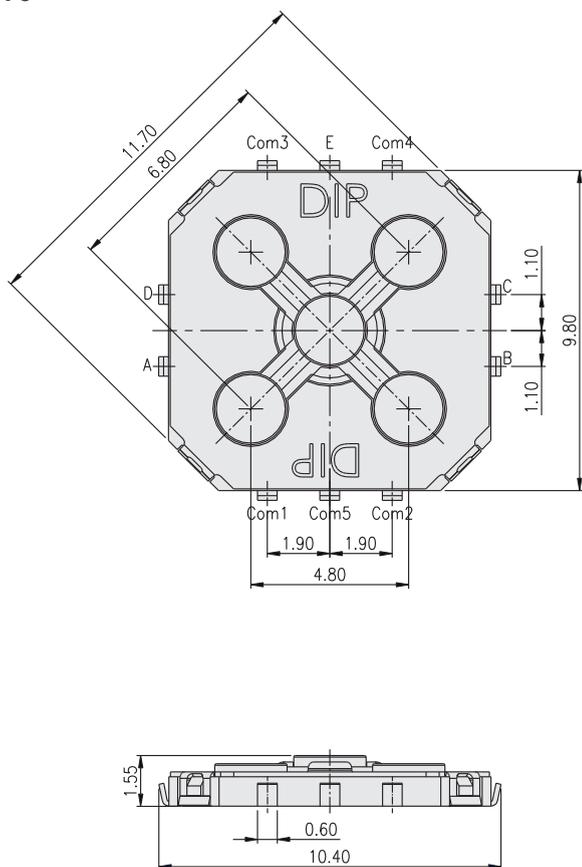

MULTI FUNCTION SWITCH