

MLC

**FEATURES**

- ※Horizontal operation
- ※Various LED colors
- ※Long operating life


**APPLICATION**

- ※Automotive
- ※Server
- ※Laptop, IPC

**SPECIFICATION**

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	220±50gf
Travel	0.25mm
Operating Life	100, 000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C


**CIRCUIT**

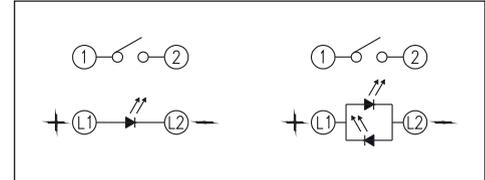

**PACKAGE**

- <Tray>  
200 pcs.
- <Tape & Reel>  
350 pcs.

**HOW TO ORDER**

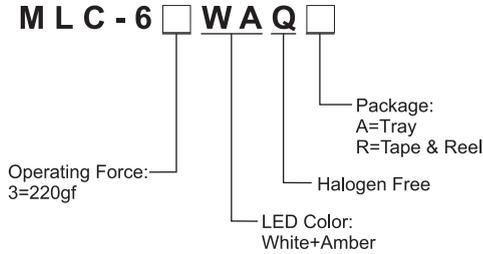

**MLC**

**LED Color Options:**

Part No.	Color	Dominant Wavelength $\lambda_p$ Typ.(nm)	Luminous Intensity $I_v$ (mcd)	Forward Voltage $V_F$ (V)		View Angle $2-\theta_{1/2}$ (Degree)
			Typ.	Typ.	Max.	
B	Blue	470	200	3.1	3.4	120°
G	Yellow Green	570	70	2.0	2.3	
W	Warm White	X:0.30 / Y:0.30	1000	3.1	3.7	

