




ZPAS7B1M1CESX-5

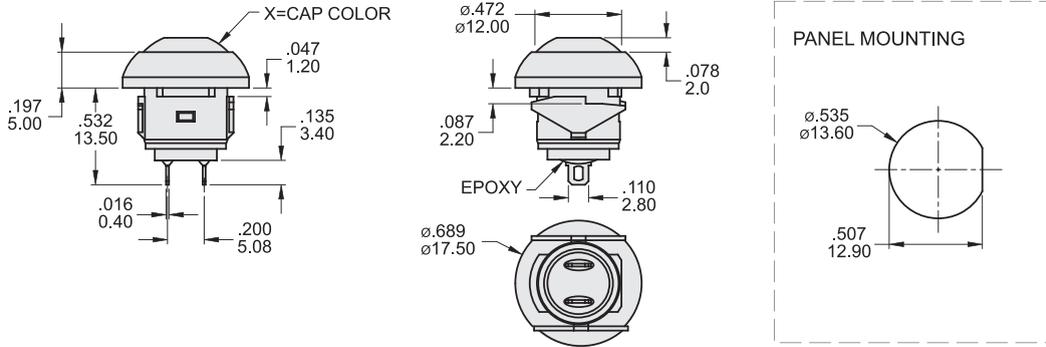


ZPAS6B2M1CESX-5

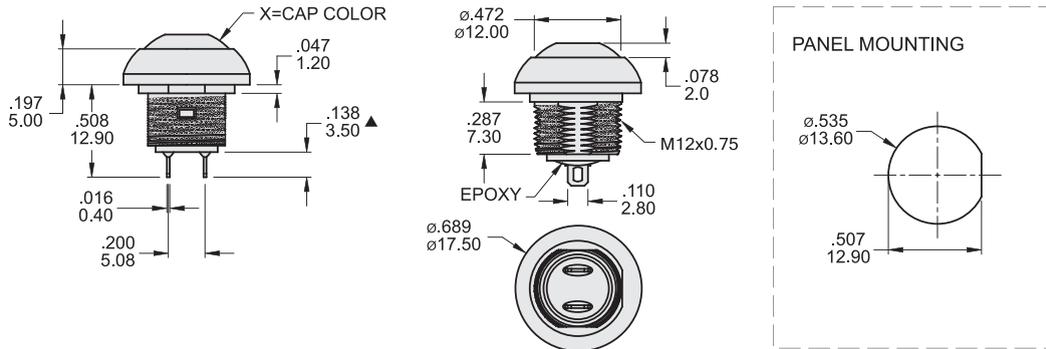

ZPAS6B3M1CESAX-5

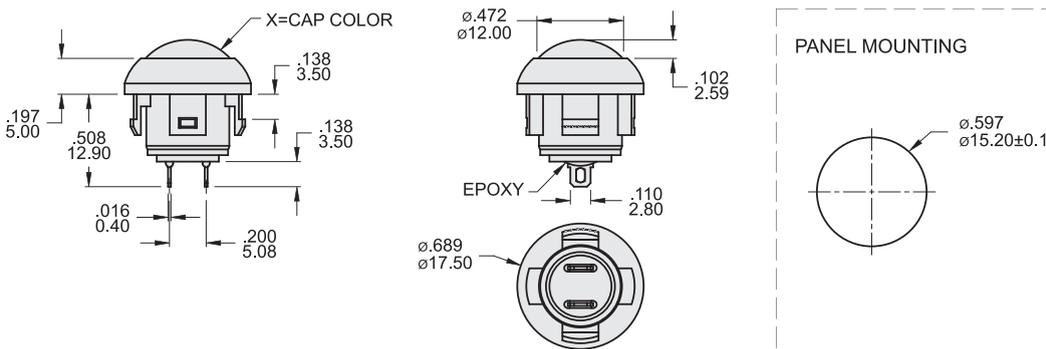

ZPAS6B2M1CESX-5LY

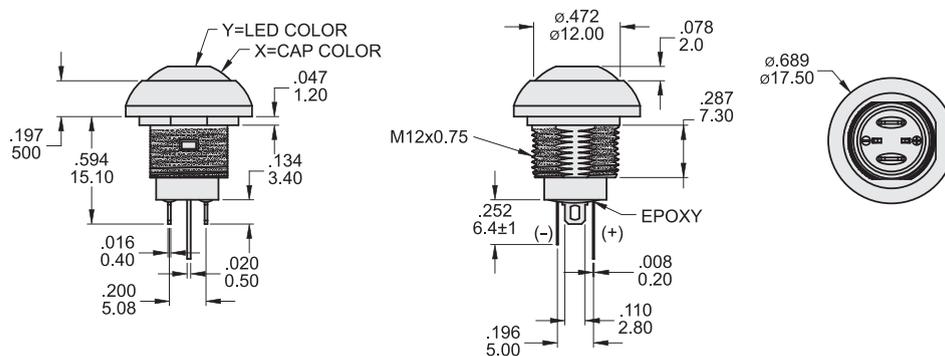


ILLUMINATED SWITCH
ZPA SERIES

Sub-Miniature Pushbutton Switches
Illuminated




ILLUMINATED SWITCH


ZPAS6B2L3CESX-5

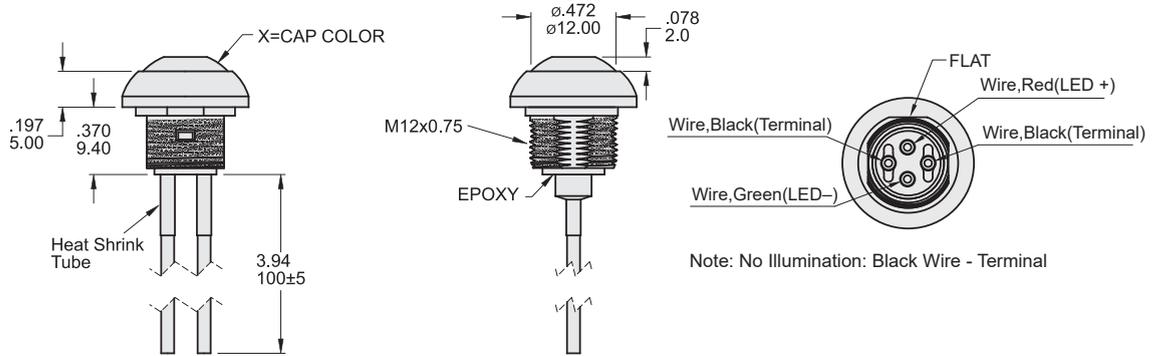


ZPAS6B2L1CASX-5

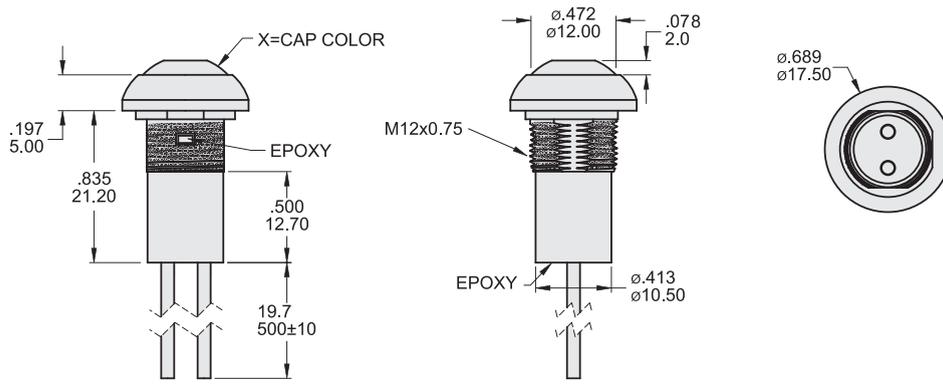


ZPAL6B2M1CESX-5LY

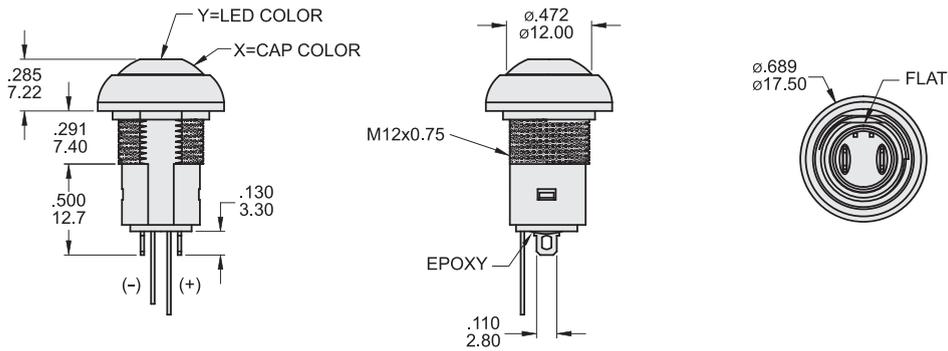


SWITCH FUNCTION

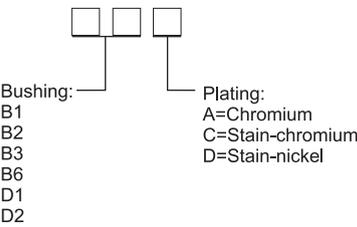


ZPAS6D1M1CESX-5

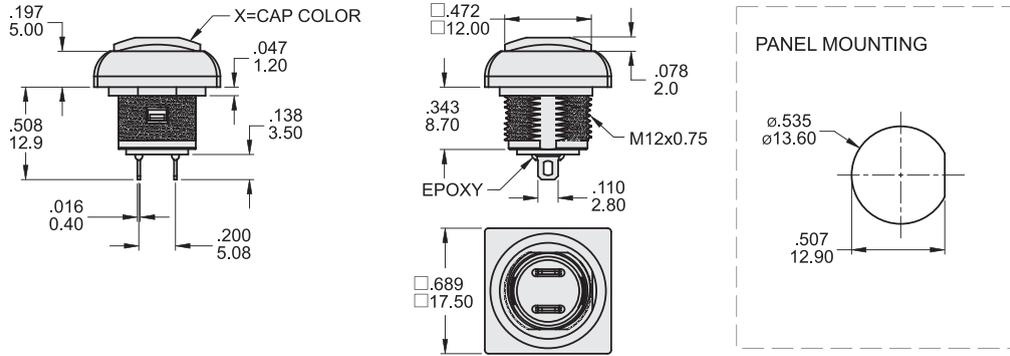


ZPAS6D2M1CESX-5

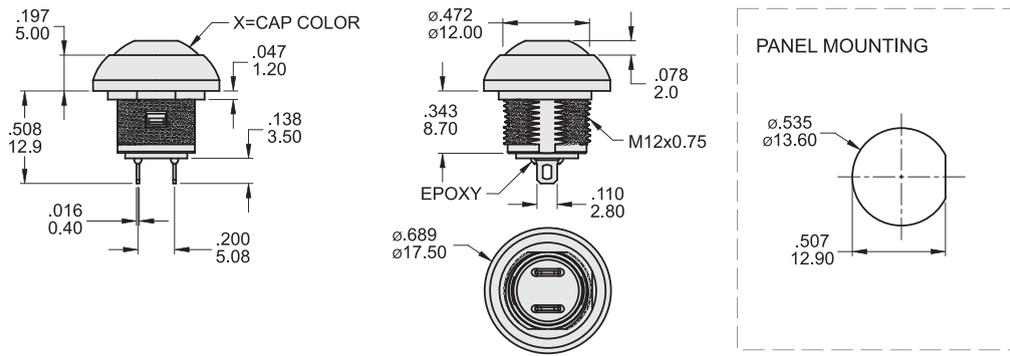


ZPAS7D2M1CESX-5

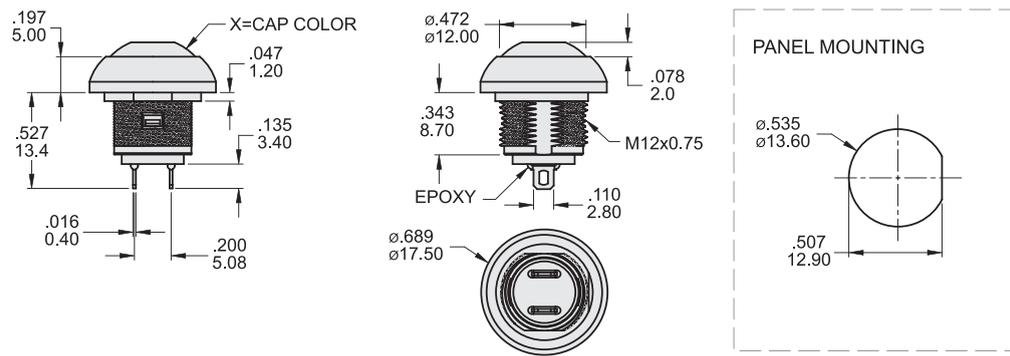

ZPAS6D2M1CESX-5LY

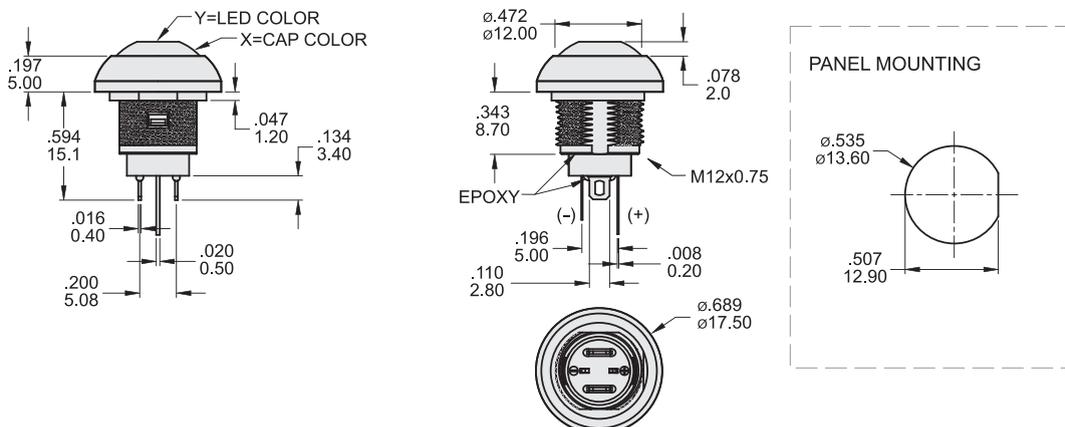


HARDWARE



MNU-PA03


LOCK WASHER



MNU-1M09

Supplied for Threaded bushing


O-RING



FCP-A253

Supplied with PAL6 and D1 / D2 / B6 options


O-RING



FCP-P004

Supplied standard with B3 options

EVA WASHER



FSU-PA01

Supplied standard with B1 / B2 options

SOLDERING PROCESSES

MANUAL SOLDERING: Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.

WAVE SOLDERING:

Recommended Soldering Temperature: 260 ± 5°C

Duration of Solder Immersion: Max 5 sec.

(PCB is 1.6mm in thickness)

IP 67 for the whole series:

Protected against the effects of immersion up to 1 m water(30min)

