

FEATURES

- ※Side actuation
- ※Wide stem for easy operating
- ※Gold contact for high reliability


APPLICATION

- ※Industrial control
- ※Automatic machines control
- ※Telecommunication


SPECIFICATION

| | |
|-----------------------|--------------------|
| Contact Rating | 25mA, 24V DC |
| Contact Resistance | 100mΩ max. |
| Insulation Resistance | 100MΩ min. 500V DC |
| Dielectric Strength | 500V AC/1 minute |
| Operating Force | 800gf max. |
| Travel | 20° |
| Operating Life | 2,000 cycles |
| Operating Temp. | -40°C ~ +85°C |
| Storage Temp. | -40°C ~ +85°C |

HOW TO ORDER

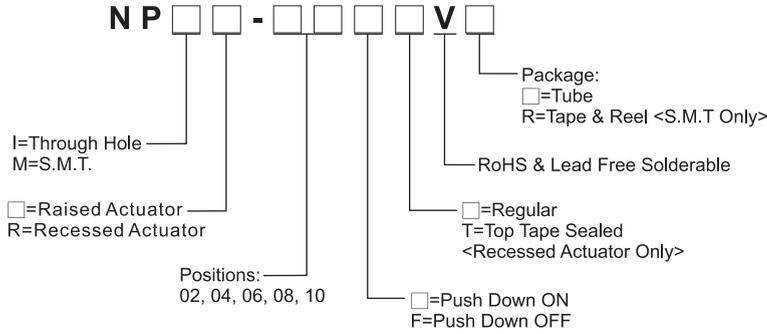




CIRCUIT

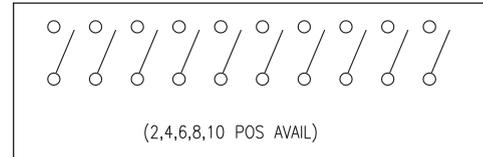


PACKAGE

- <Tube>
 NPI(R)/NPM(R)-02: 70 pcs
 NPI(R)/NPM(R)-04: 40 pcs
 NPI(R)/NPM(R)-06: 28 pcs
 NPI(R)/NPM(R)-08: 20 pcs
 NPI(R)/NPM(R)-10: 16 pcs
- <Tape & Reel>
 NPM(R)-02, 04, 06, 08, 10: 700 pcs

NPI

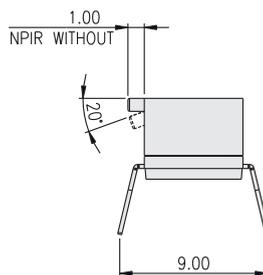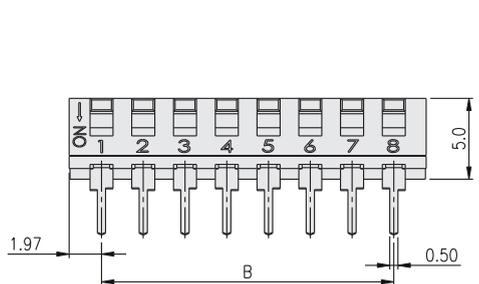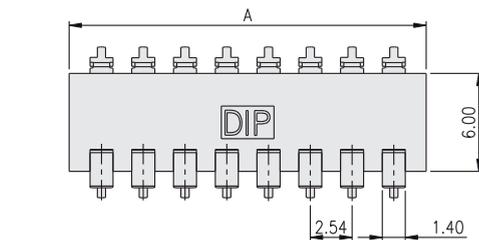


| PART NO. | NO.OF POS. | DIM.A | DIM.B |
|-----------|------------|-------|-------|
| NPI(R)-02 | 2 | 6.48 | 2.54 |
| NPI(R)-04 | 4 | 11.56 | 7.62 |
| NPI(R)-06 | 6 | 16.64 | 12.70 |
| NPI(R)-08 | 8 | 21.72 | 17.78 |
| NPI(R)-10 | 10 | 26.80 | 22.86 |


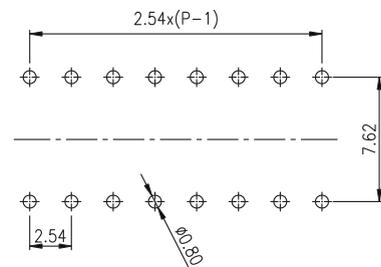


P.C.B. LAYOUT

NPM

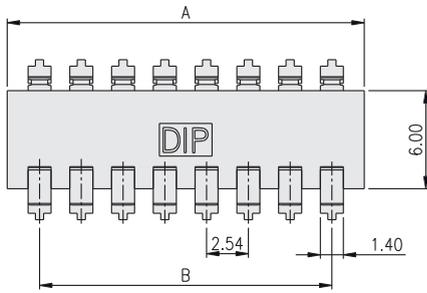

| PART NO. | NO.OF POS. | DIM.A | DIM.B |
|-----------|------------|-------|-------|
| NPM(R)-02 | 2 | 6.48 | 2.54 |
| NPM(R)-04 | 4 | 11.56 | 7.62 |
| NPM(R)-06 | 6 | 16.64 | 12.70 |
| NPM(R)-08 | 8 | 21.72 | 17.78 |
| NPM(R)-10 | 10 | 26.80 | 22.86 |

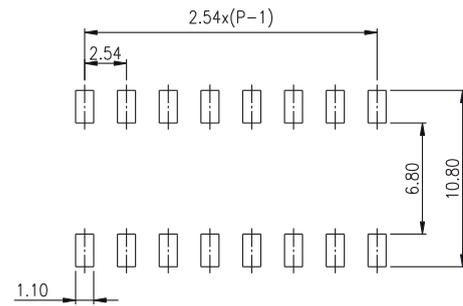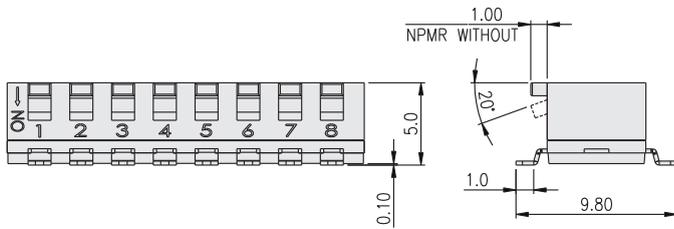

P.C.B. LAYOUT

DIP SWITCH