

FEATURES

- ※Single In-line Packaging saves PCB space
- ※Available in vertical or right angle models


APPLICATION

- ※Industrial control
- ※Computers and peripherals
- ※Variety of function controls


SPECIFICATION

Contact Rating	10mA, 5V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	300V AC/1 minute
Operating Force	800gf max.
Operating Life	500 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

CIRCUIT

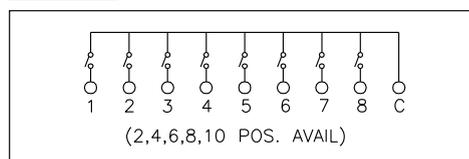

HOW TO ORDER

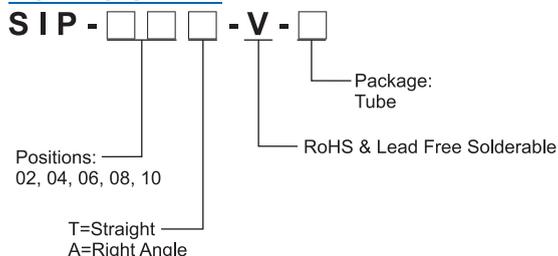


PACKAGE




<Tube>

SIP-02A: 56 pcs	SIP-02T: 61 pcs
SIP-04A: 35 pcs	SIP-04T: 37 pcs
SIP-06A: 25 pcs	SIP-06T: 26 pcs
SIP-08A: 20 pcs	SIP-08T: 20 pcs
SIP-10A: 16 pcs	SIP-10T: 17 pcs

SIP-A

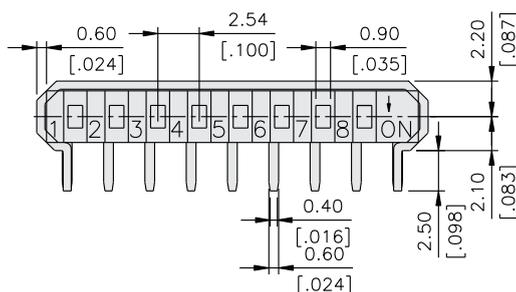


SIP-10-V	10	27.94[1.100]	25.40[1.000]
SIP-08-V	8	22.86[.900]	20.32[.800]
SIP-06-V	6	17.78[.700]	15.24[.600]
SIP-04-V	4	12.70[.500]	10.16[.400]
SIP-02-V	2	7.62[.300]	5.08[.200]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B

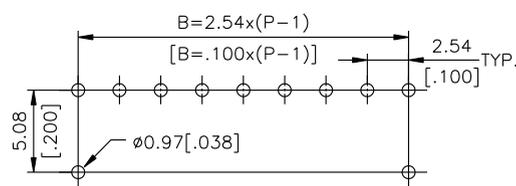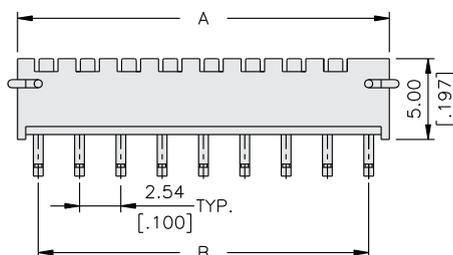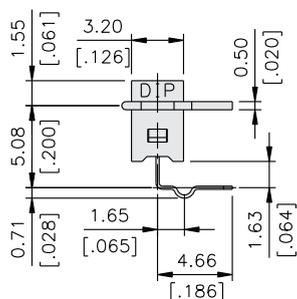




P.C.B. LAYOUT

SIP-T

DIP SWITCH

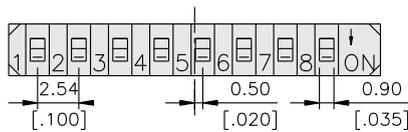

SIP-10-V	10	27.94[1.100]	25.40[1.000]
SIP-08-V	8	22.86[.900]	20.32[.800]
SIP-06-V	6	17.78[.700]	15.24[.600]
SIP-04-V	4	12.70[.500]	10.16[.400]
SIP-02-V	2	7.62[.300]	5.08[.200]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B

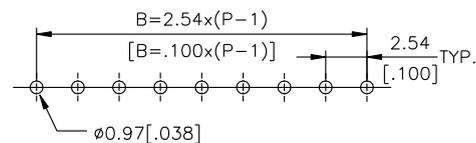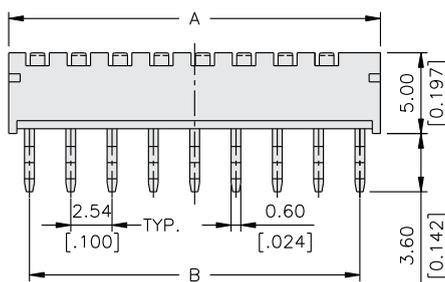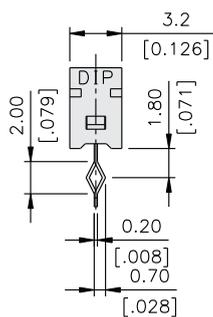

P.C.B. LAYOUT