

FEATURES

- ※ Compact-size 2.8*1.9mm
- ※ Low profile with 0.60mm
- ※ Long operating cycles


APPLICATION

- ※ Smart phone
- ※ Digital camera, Medical
- ※ Portable electronic device
- ※ 3C products

SPECIFICATION

Contact Rating	10μA, 2V DC to 20mA, 15V DC
Contact Resistance	500mΩ max.
Insulation Resistance	50mΩ min. 100V DC
Dielectric Strength	250V AC/ 1 minute.
Operating Force	160±50gf / 200±50gf / 300±70gf
Travel	0.15±0.10mm
Operating Life	500,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

CIRCUIT

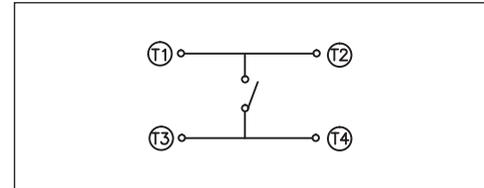


PACKAGE





<Tape & Reel>
16000 pcs

HOW TO ORDER

T 1 A □ □ Q R L

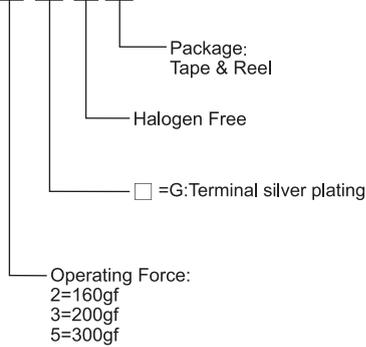

T1A

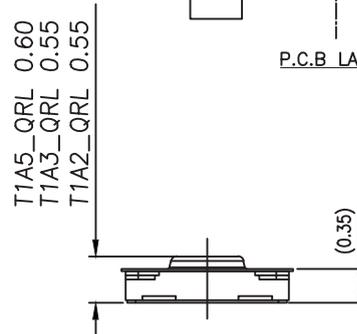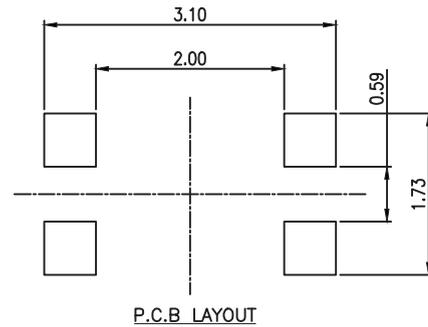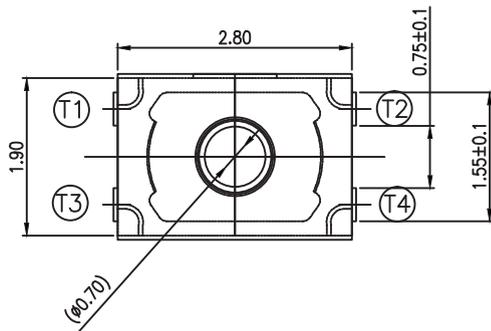

TACT SWITCH