


TACT SWITCH
T1B SERIES

2.6*1.6 SMT Type
(H=0.55mm)

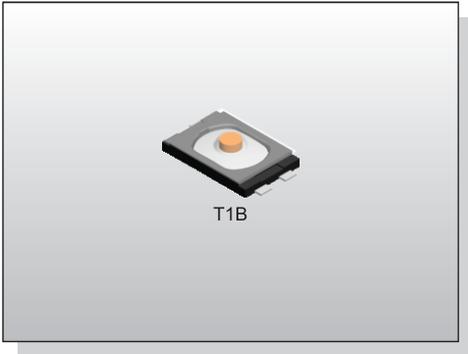

FEATURES

- ※ Compact-size 2.6*1.6mm
- ※ Low profile with 0.55mm
- ※ 200,000 operating cycles

APPLICATION

- ※ Smart phone
- ※ Digital camera, Medical
- ※ Portable electronic device
- ※ 3C products

SPECIFICATION


Contact Rating	10uA, 2V DC to 20mA, 15V DC
Contact Resistance	500mΩ max.
Insulation Resistance	50MΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	60±30gf/100±50gf 160±50gf/240±70gf
Travel	0.11mm
Operating Life	300,000 cycles for 100/160/240gf 500,000 cycles for 60gf
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

T 1 B □ Q R

- Package: Tape & Reel
- Halogen Free
- Operating Force:
0=60gf
1=100gf
2=160gf
4=240gf

CIRCUIT




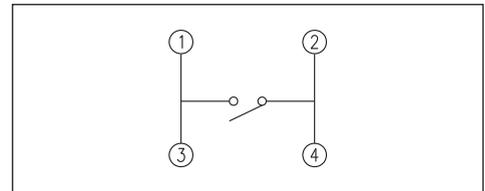


PACKAGE

<Tape & Reel>
8000 pcs

TACT SWITCH

T1B

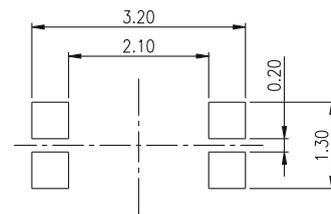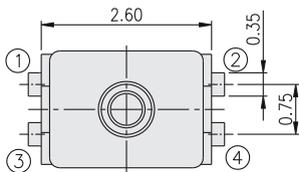

P.C.B. LAYOUT