

FEATURES

- ※ Compact-size 3.0*2.0mm
- ※ Low profile with 0.60mm
- ※ Long operating cycles

APPLICATION


- ※ Smart phone
- ※ Digital camera, Medical
- ※ Portable electronic device
- ※ 3C products

SPECIFICATION


Contact Rating	10μA , 2 V DC to 20mA , 15V DC
Contact Resistance	500mΩ max.
Insulation Resistance	50mΩ min. 100V DC
Dielectric Strength	250V AC/1 minute
Operating Force	160±50gf / 180±50gf 240±70gf / 330±100gf
Travel	0.13mm / 0.15mm(for330g)
Operating Life	500,000 cycles
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

T 3 C □ G Q R L

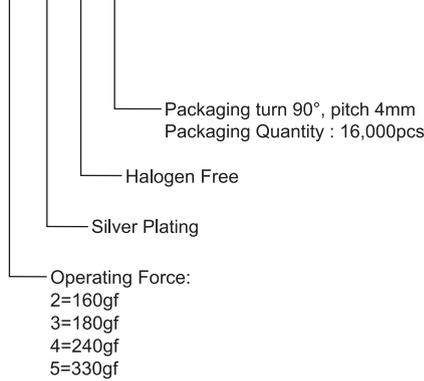



CIRCUIT



PACKAGE

<Tape & Reel>
16000 pcs

T3C

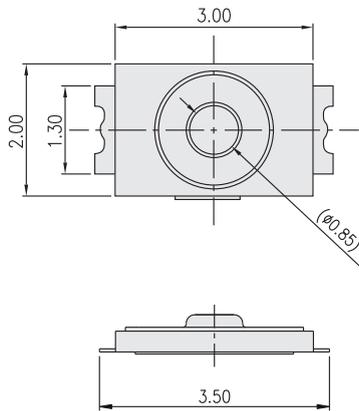

P.C.B. LAYOUT