


# TACT SWITCH T(E-5) SERIES

5.2x5.2 SMT & J SMT Type  
(H: 0.8 / 1.5mm)

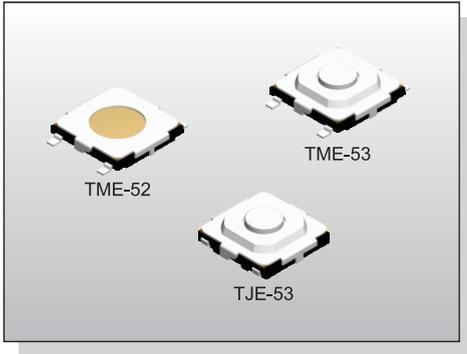

## FEATURES

- ※ Compact-sized 5.2x5.2mm
- ※ Long operating life
- ※ With ground terminal


## APPLICATION

- ※ Smart phone
- ※ Digital camera, Medical
- ※ Portable electronic device


## SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 500V DC
Dielectric Strength	250V AC/1 minute
Operating Force	70±50gf/ 100±50gf/160±50gf 260±50gf
Travel	0.25mm
Operating Life	200,000 cycles for 260gf 1,000,000 cycles for 160/100/70gf
Operating Temp.	-40°C ~ +85°C
Storage Temp.	-40°C ~ +85°C

## HOW TO ORDER

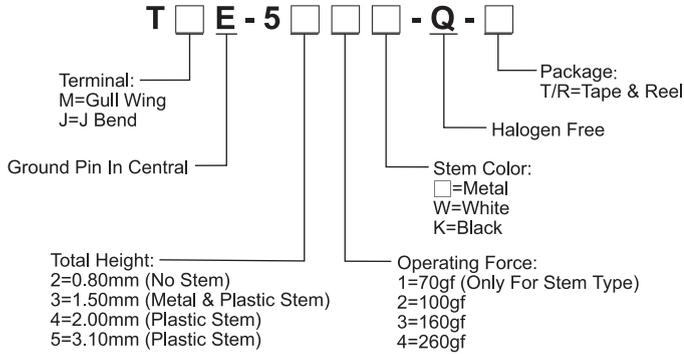

## CIRCUIT


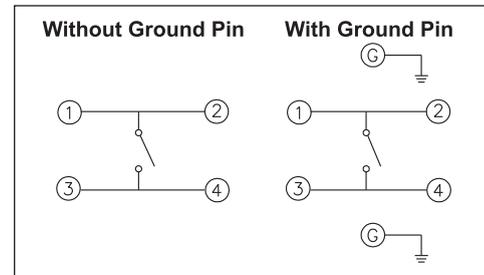


## PACKAGE

### <Tape & Reel>



- T□E-52, 53=4000 pcs
- T□E-54=3000 pcs
- T□E-55=2000 pcs

## TME-5

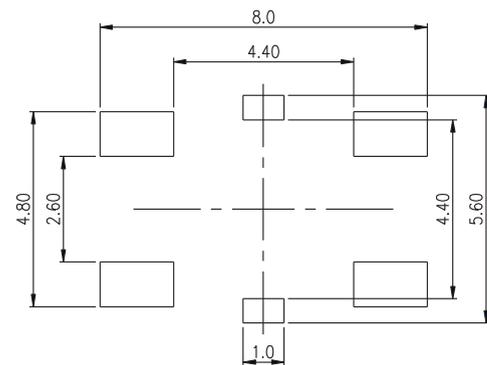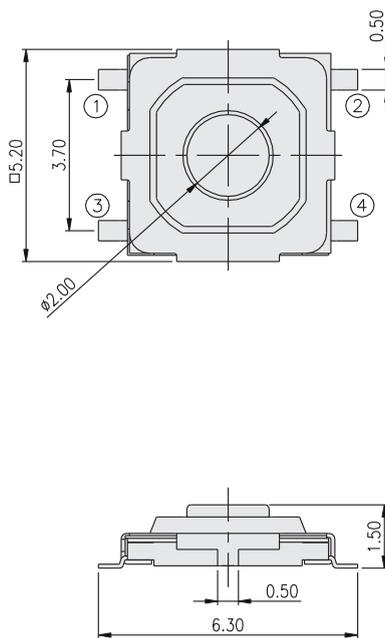

P.C.B. LAYOUT



TJE-53

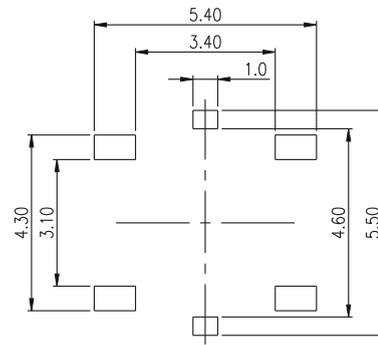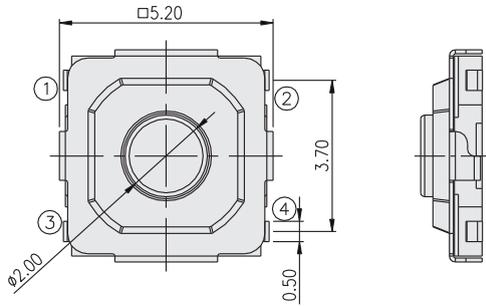

P.C.B. LAYOUT

TACT SWITCH

TME-52

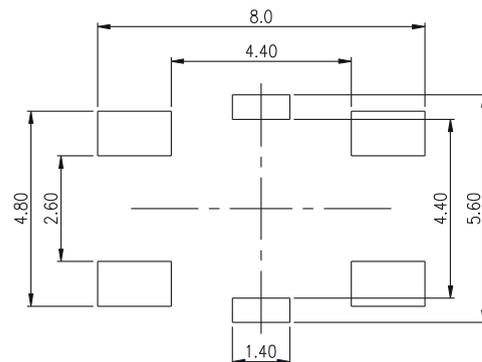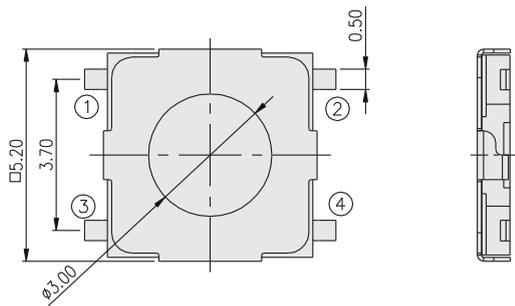

P.C.B. LAYOUT